



WHITE BODY GVT
PORCELAIN TILES

600x
600MM



Digital

PORCELAIN TILES
600x600mm



WOODEN SERIES



Digital

PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING



RECTIFIED



ECO FRIENDLY


6082

Digital

PORCELAIN TILES
600x600mm



WOODEN SERIES

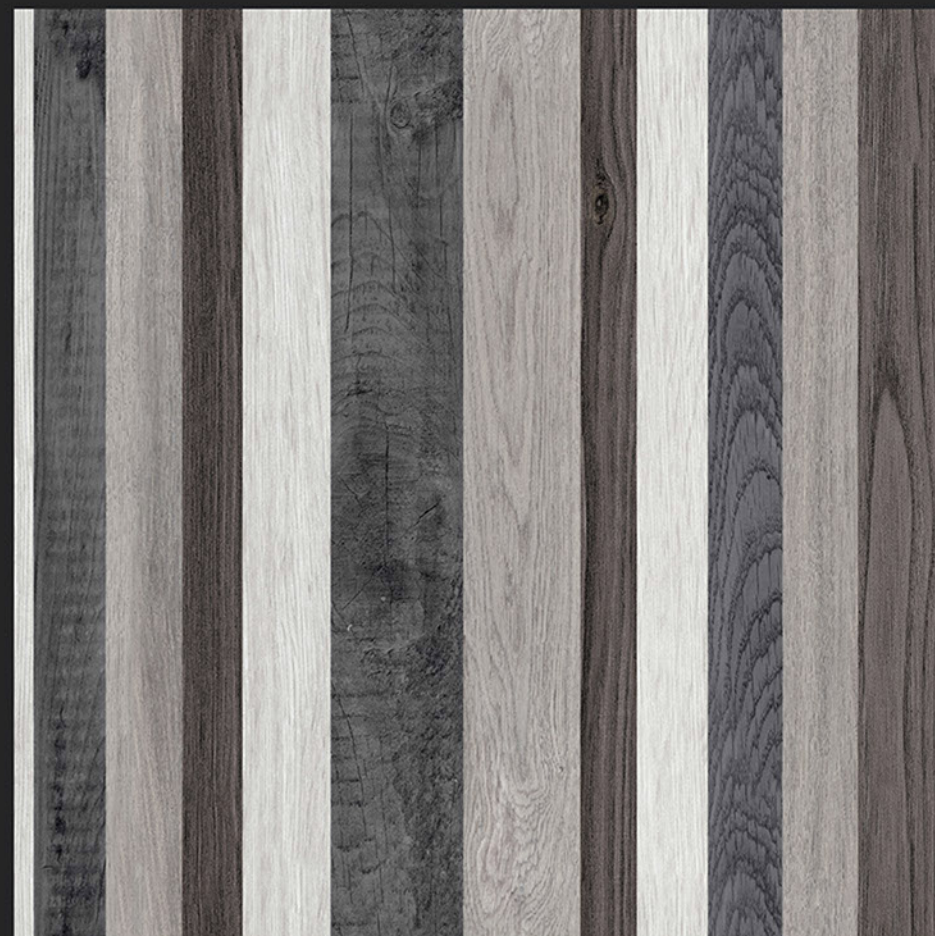

DIGITAL
PRINTING



RECTIFIED



ECO FRIENDLY

6083

Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES




DIGITAL
PRINTING

RECTIFIED

ECO FRIENDLY

6084

Digital
PORCELAIN TILES
600x600mm

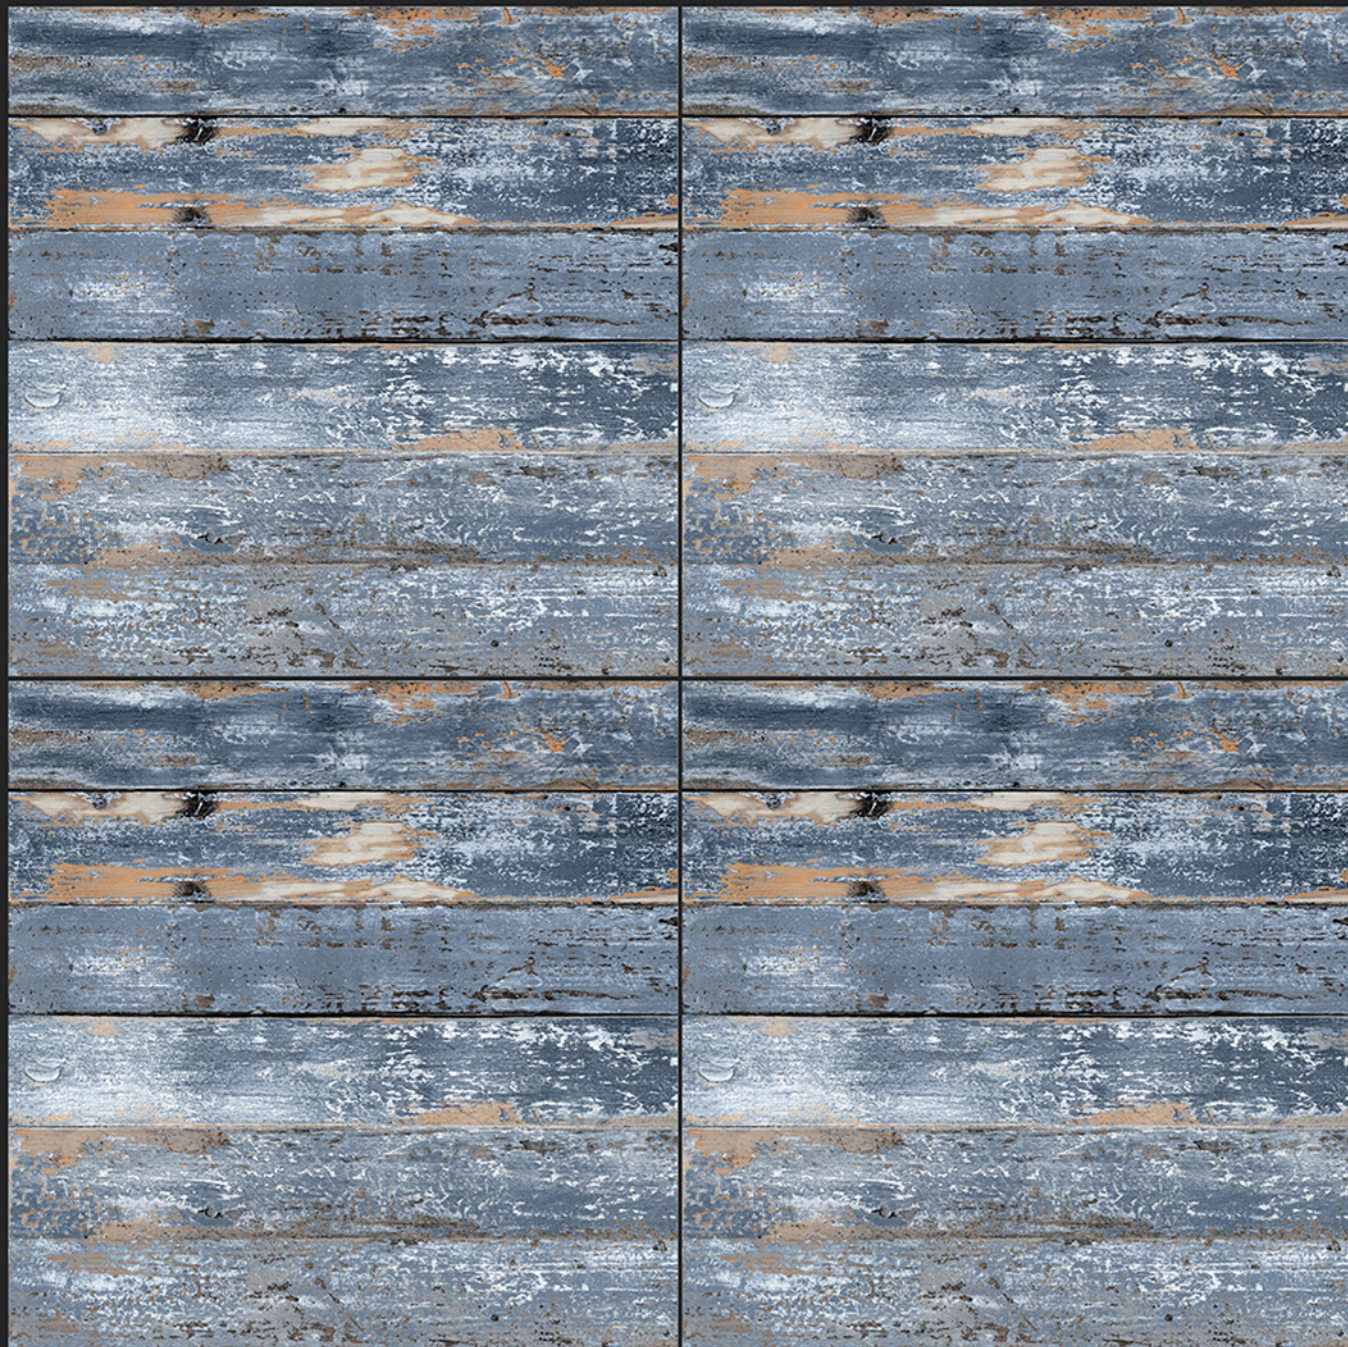

WOODEN SERIES



DIGITAL
PRINTING


RECTIFIED

ECO FRIENDLY

6085

Digital

PORCELAIN TILES
600x600mm

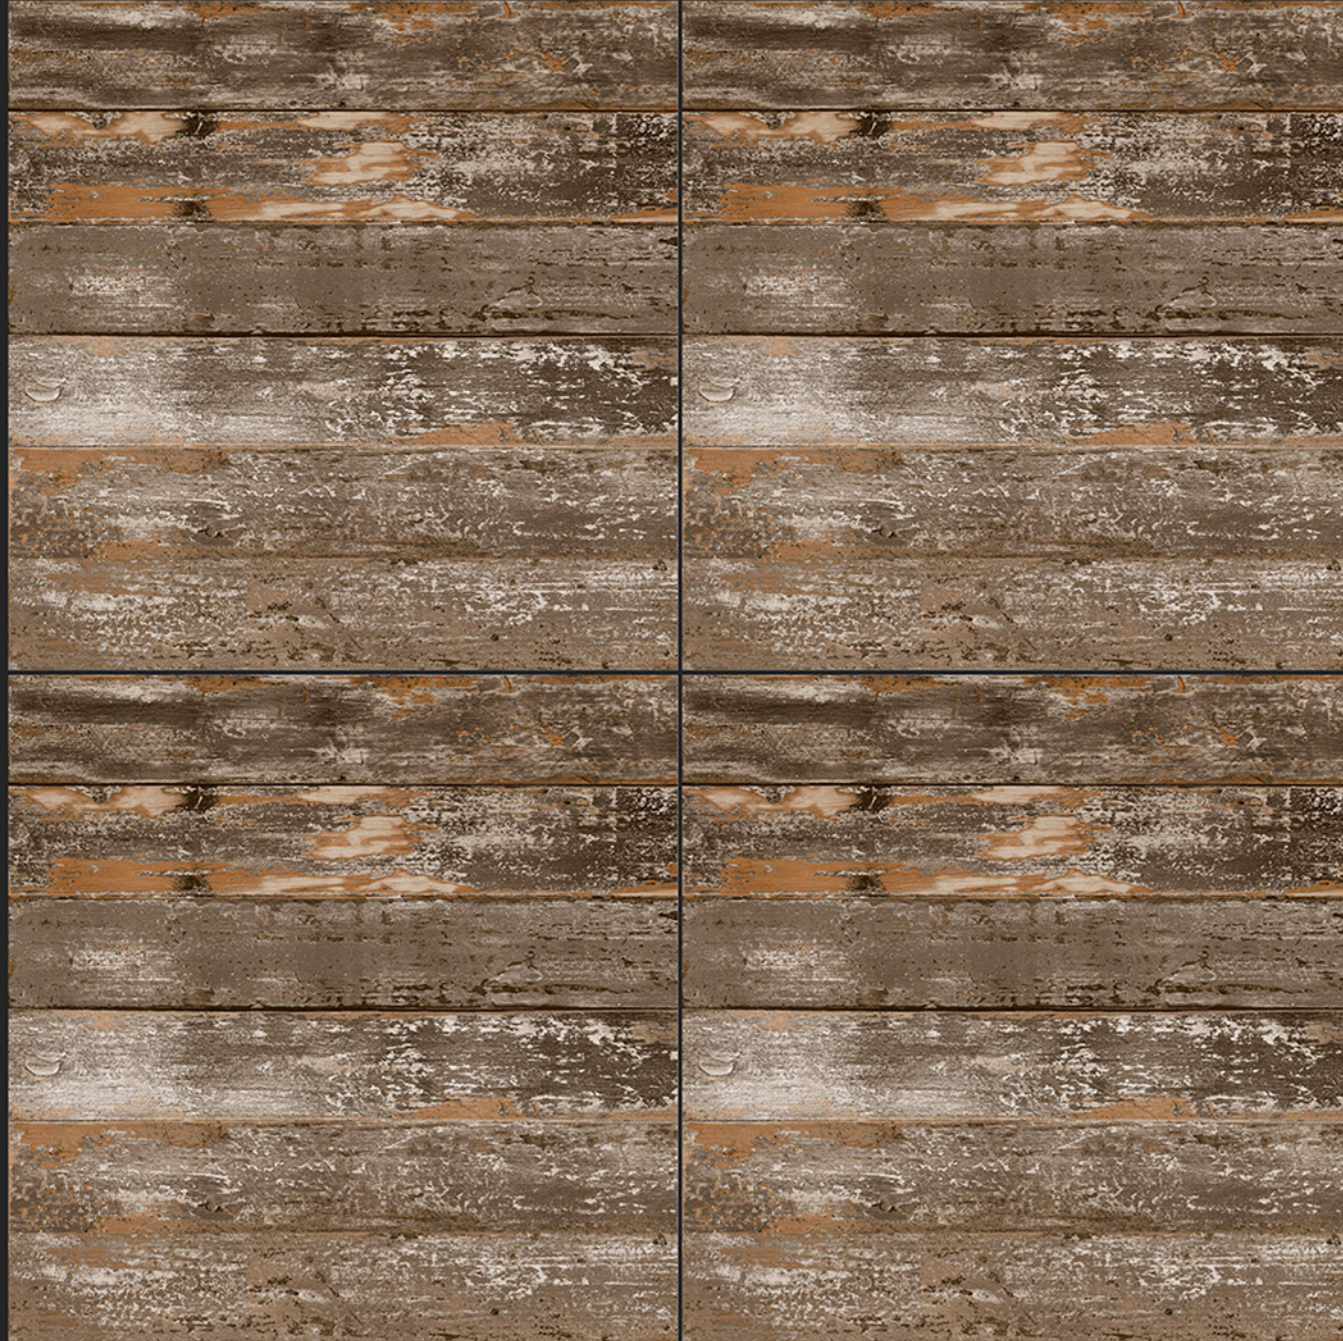

WOODEN SERIES



DIGITAL
PRINTING



RECTIFIED



ECO FRIENDLY

6086



WOODEN SERIES





WOODEN SERIES






WOODEN SERIES





WOODEN SERIES

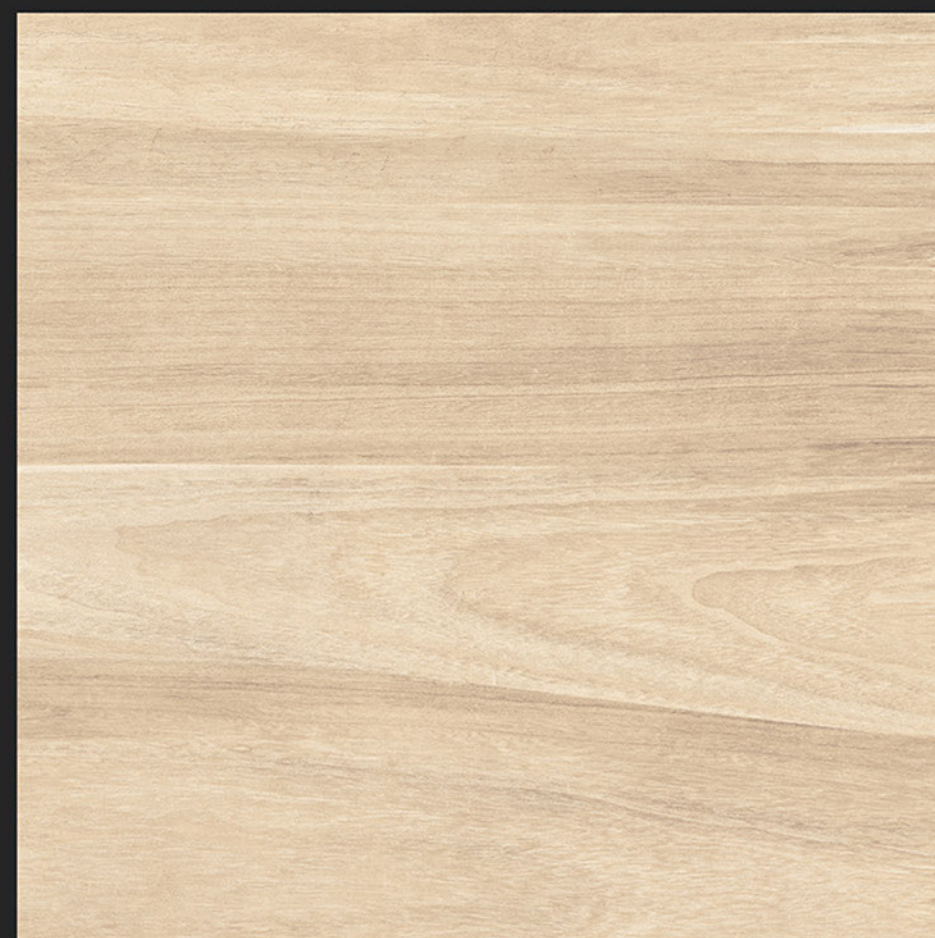



WOODEN SERIES



Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING

RECTIFIED

ECO FRIENDLY

6092

Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING

RECTIFIED

ECO FRIENDLY

6093

Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING

RECTIFIED

ECO FRIENDLY

6094

Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING

RECTIFIED

ECO FRIENDLY

6095




WOODEN SERIES






WOODEN SERIES



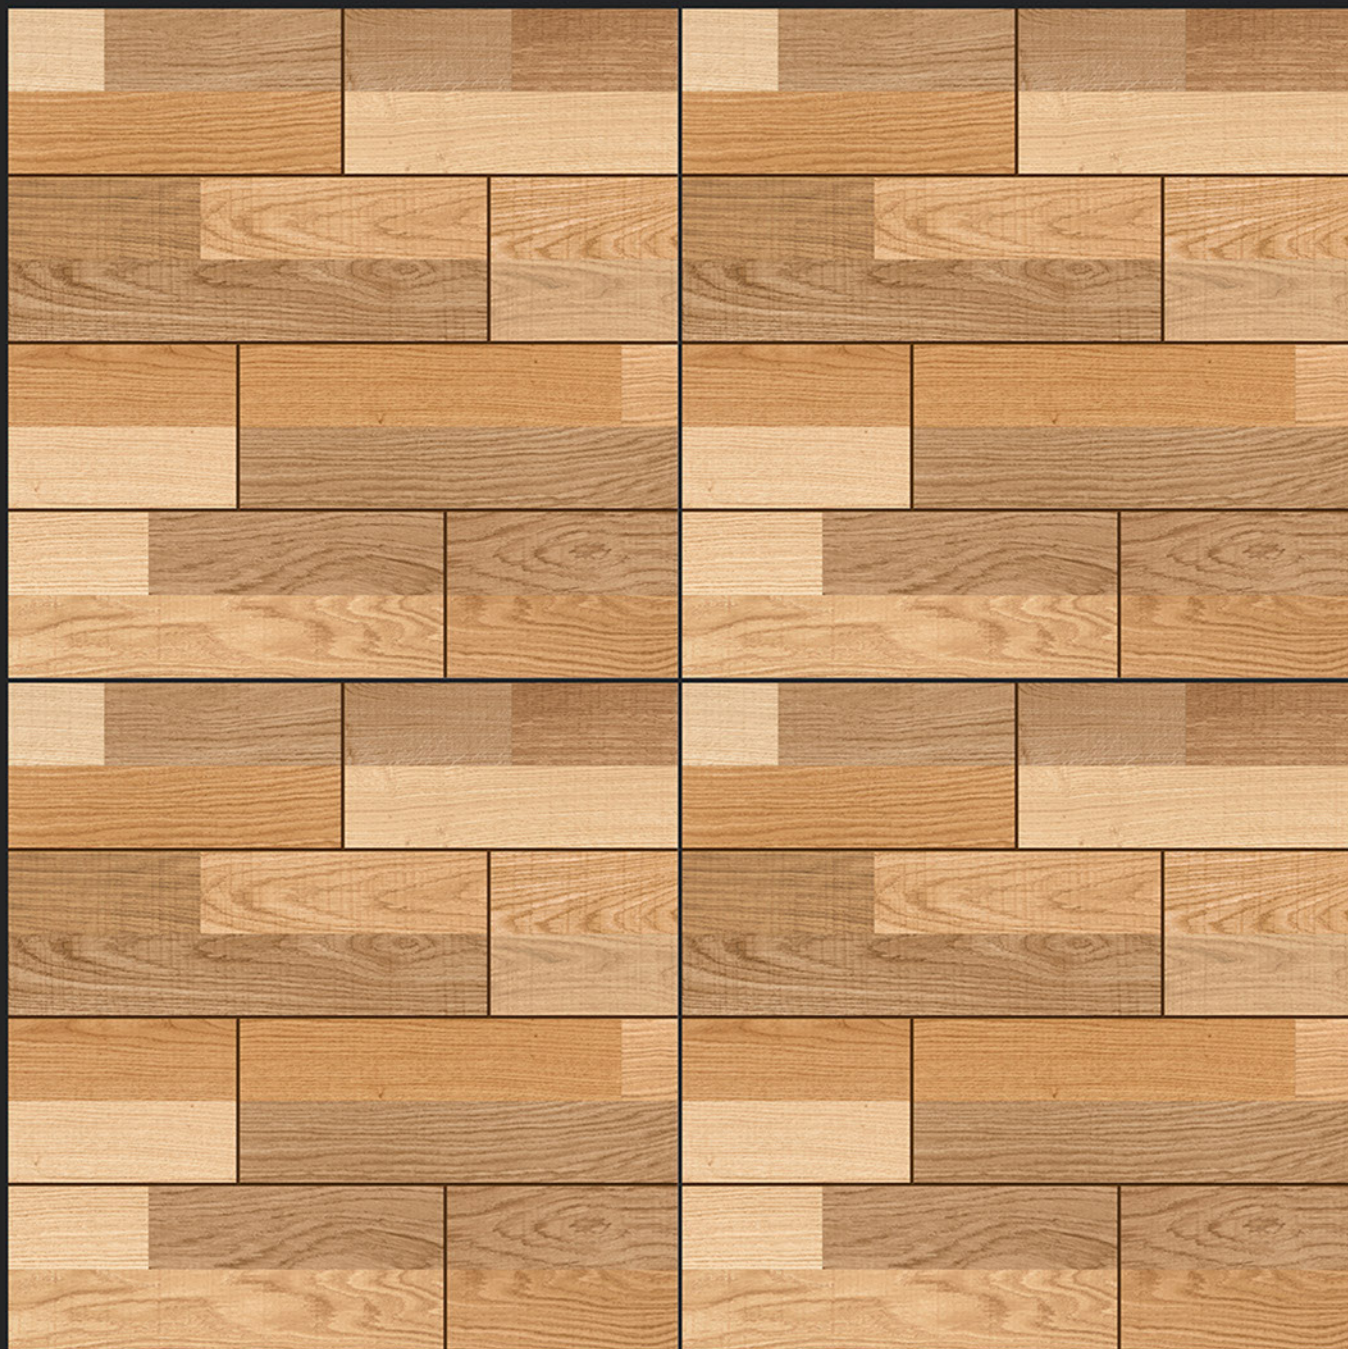

WOODEN SERIES

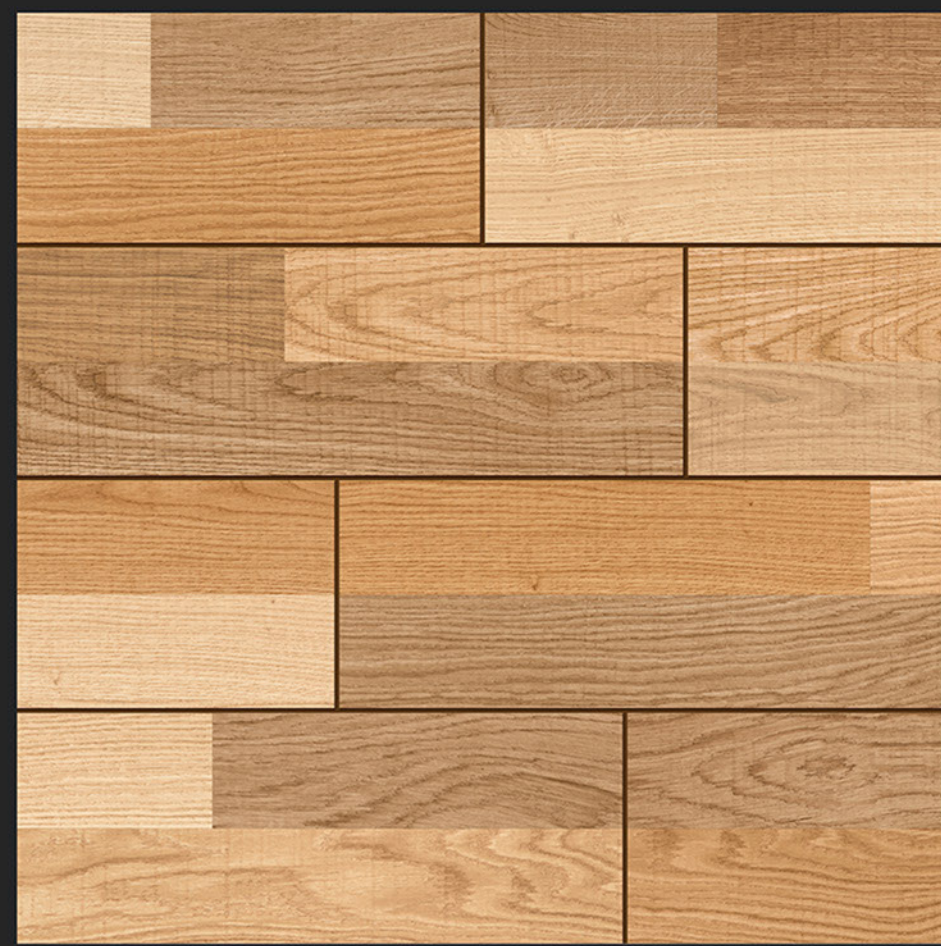



WOODEN SERIES




Digital

PORCELAIN TILES
600x600mm



WOODEN SERIES

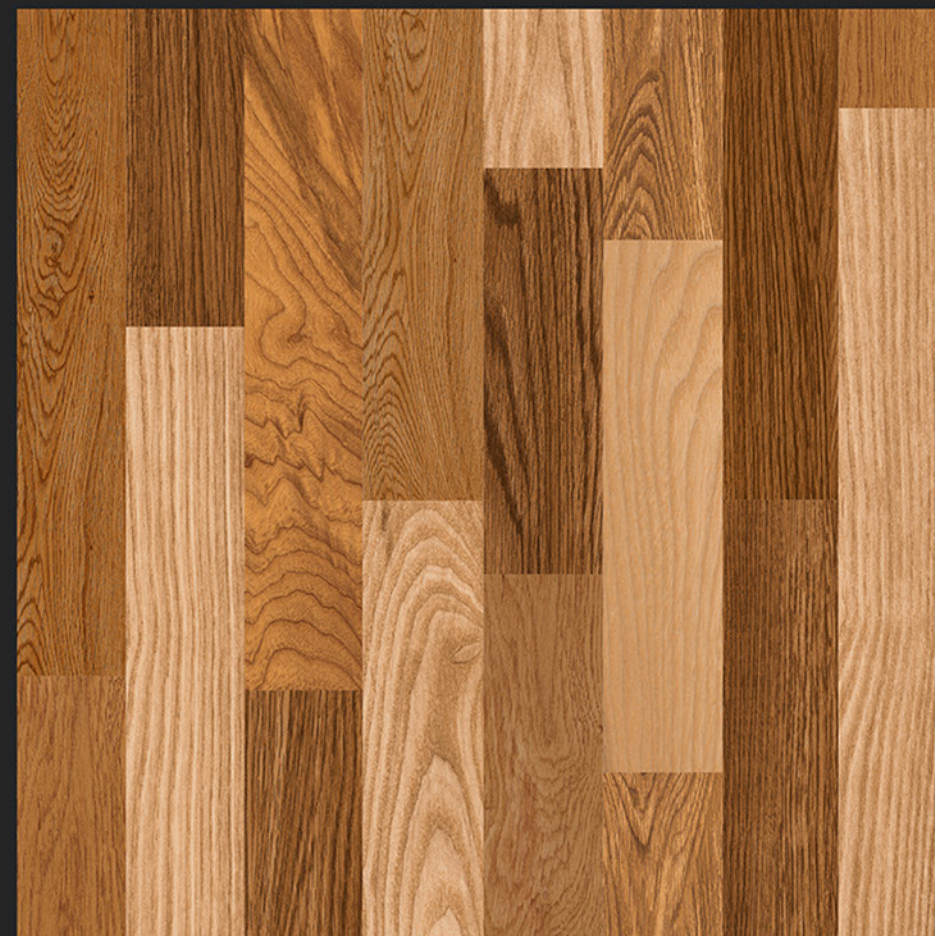

DIGITAL
PRINTING




RECTIFIED



ECO FRIENDLY

6100

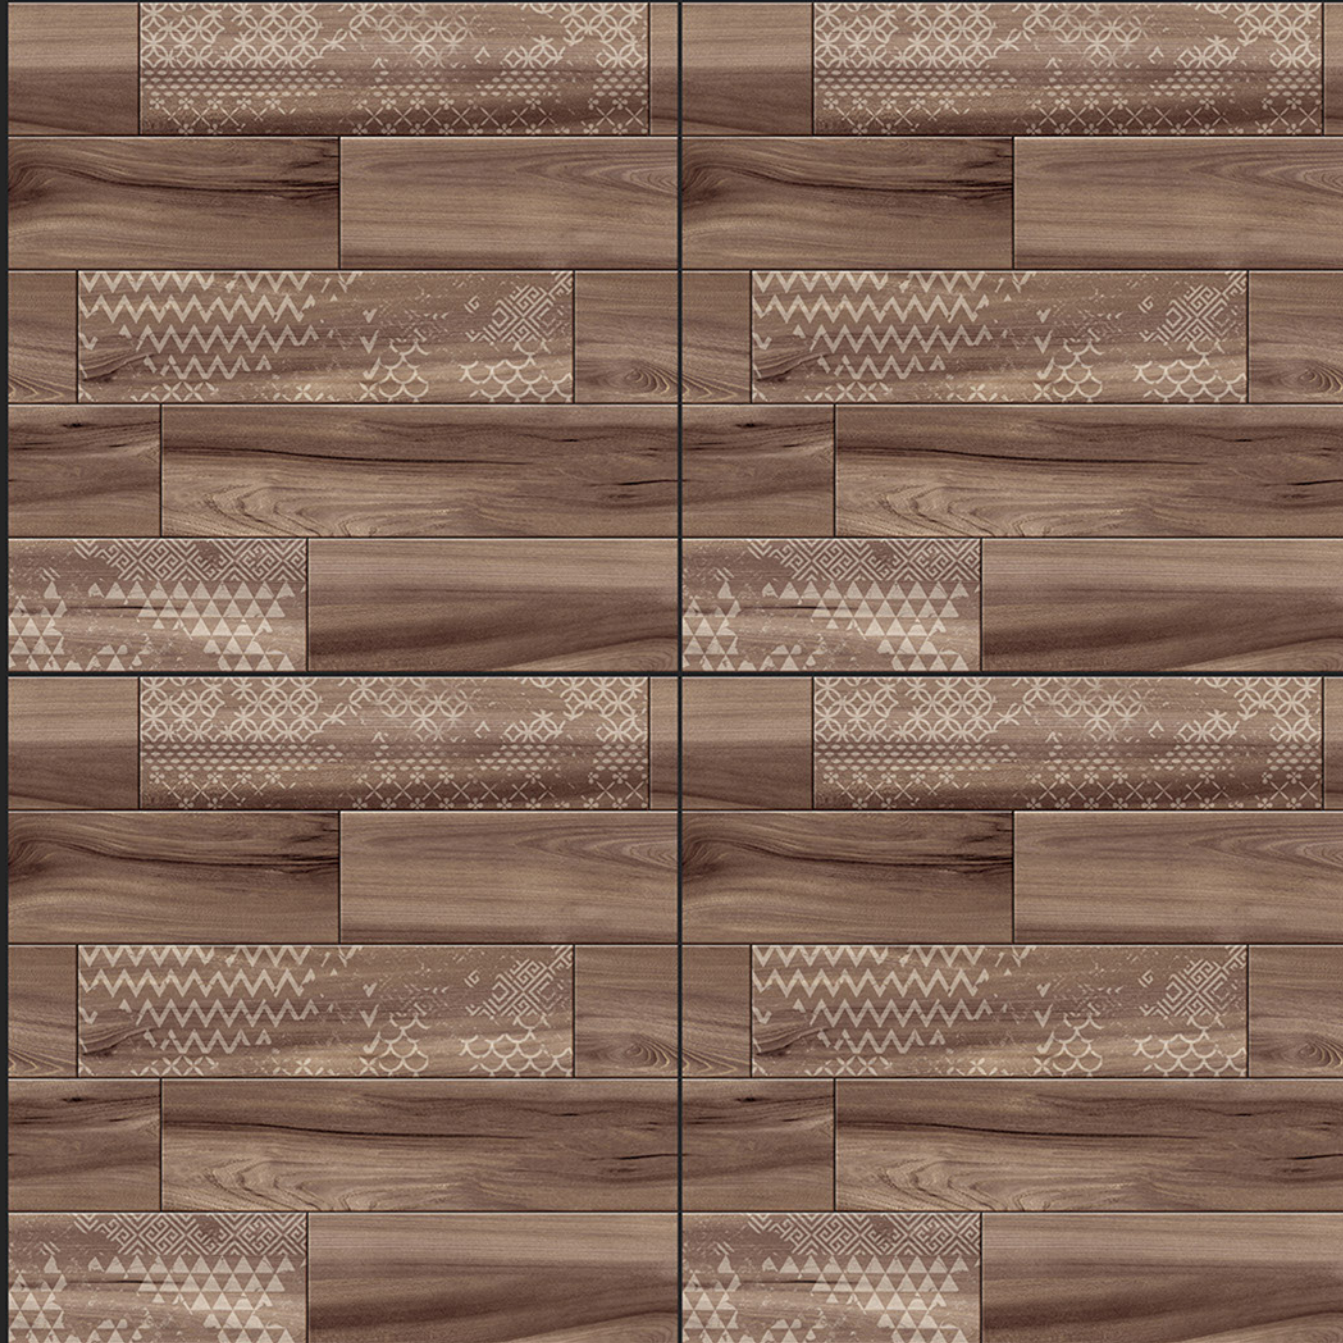

WOODEN SERIES





WOODEN SERIES






WOODEN SERIES





WOODEN SERIES



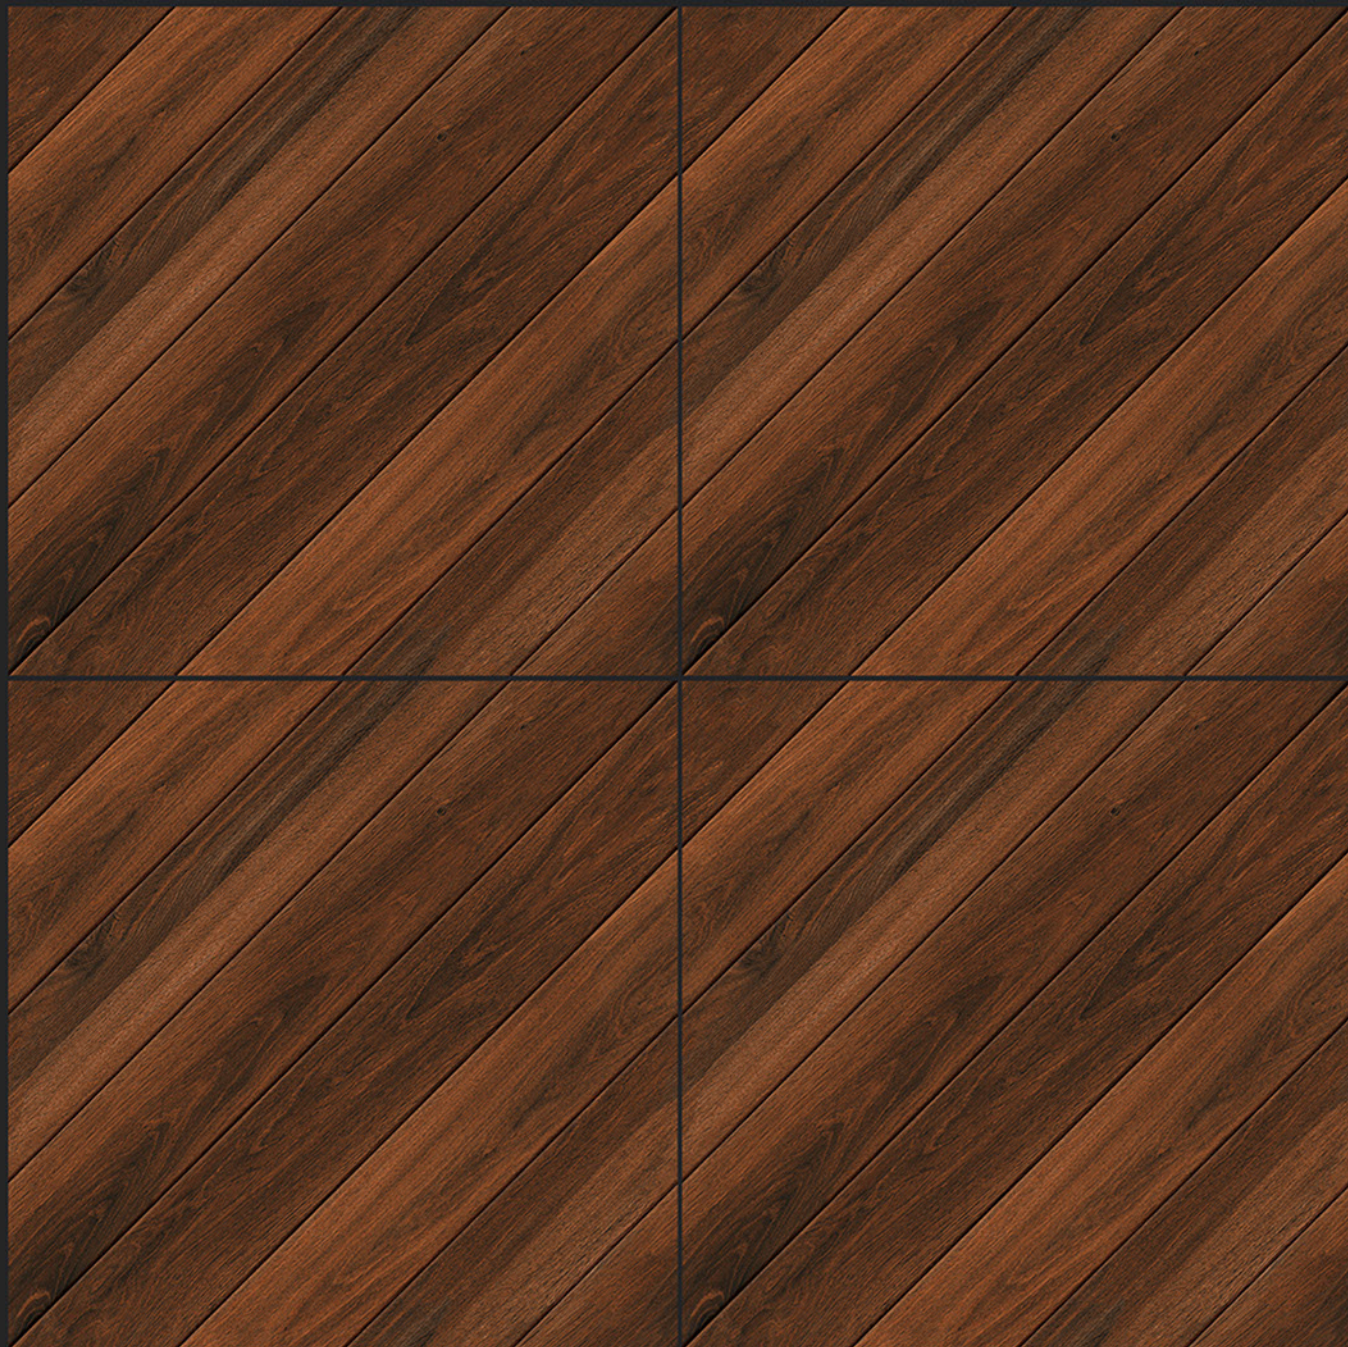

WOODEN SERIES



Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING

RECTIFIED

ECO FRIENDLY

6106

Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING

RECTIFIED

ECO FRIENDLY

6107



WOODEN SERIES



Digital
PORCELAIN TILES
600x600mm



WOODEN SERIES



DIGITAL
PRINTING



RECTIFIED




ECO FRIENDLY

6109



WOODEN SERIES

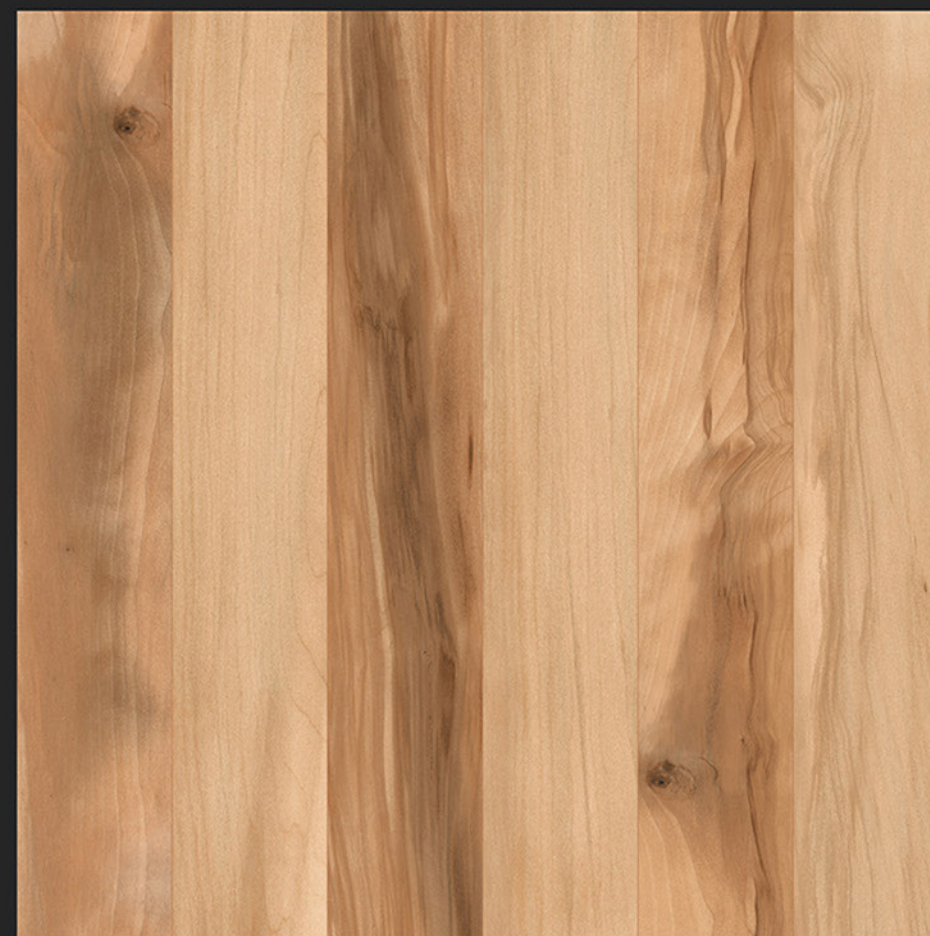

TECHNICAL SPECIFICATION

Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	± 3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 - 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	NIII	NIII	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note : Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing Instruction on the cartons of the tiles as on responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAIL

Size	Thickness	No. of Tiles	Area Approx.	Weight Approx.
600 X 600 MM	9 MM	4 Pcs.	1.44 Sq. Mtr.	28 Kg.

UTILITY OF FLOOR TILES

