

bout
company

Greatness does not come from talking big, but walking the talk. When we started we wanted to develop a business that makes the world an extraordinary place to live. We are blessed with our business where people uses our products daily, in their homes and work place.

We are blessed to be in buildings business; excellent buildings are totally necessary to live exuberantly.

Our tiles are a part of erecting great buildings.

## Innovative product

Mildstone's innovation excellence and technological prowess has helped unveil this extraordinary future surface. We are extremely proud to introduce CORESTONE- created by exclusive italian technology and created to seamlessly replace granite, marble, corian and quartz surfaces. To the untrained eye, Core Stone is almost impossible to distinguish from natural stone. Corestones essentially are the next generation on from Quartz surfaces, perfecting blend of man-made processes with natural minerals to create a surface, which is mechanically superior in everyway. To not only mimic natural stone designs and patterns, but also go above beyond them with our Corestone collection, an innovative Italian technology has been adopted. Traditional natural stone are formed over thousands of years but due to recent technological advancements, Corestone can be created in just few hours. MInerals and stone particles like the ones found in nature are carefully selected for ensuring the desired quality, colour and texture in Core Stone.




Application area


BAR & RESTAURANT




FLOORS WALLS & STAIRS



TOPS & KITCHEN




**BATHTUB** 




DOORS & SLIDING WALLS




INTERIOR & DESIGN




SHELVES & CONSOLE




DINING TABLE



**WORK TOP** 




TOPS & BATHROOMS




WASH BASIN




WINDOWS & DOOR FRAME






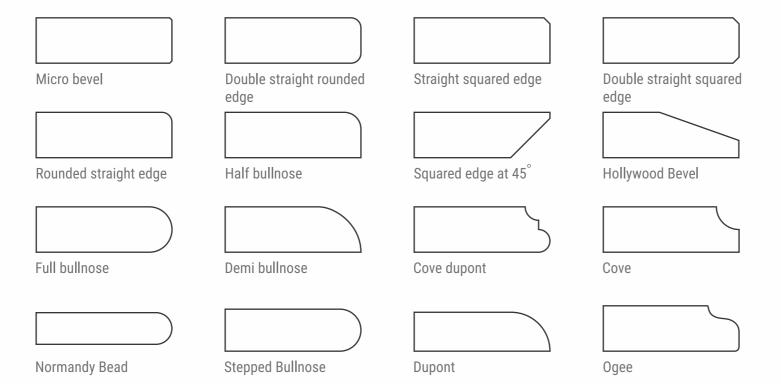



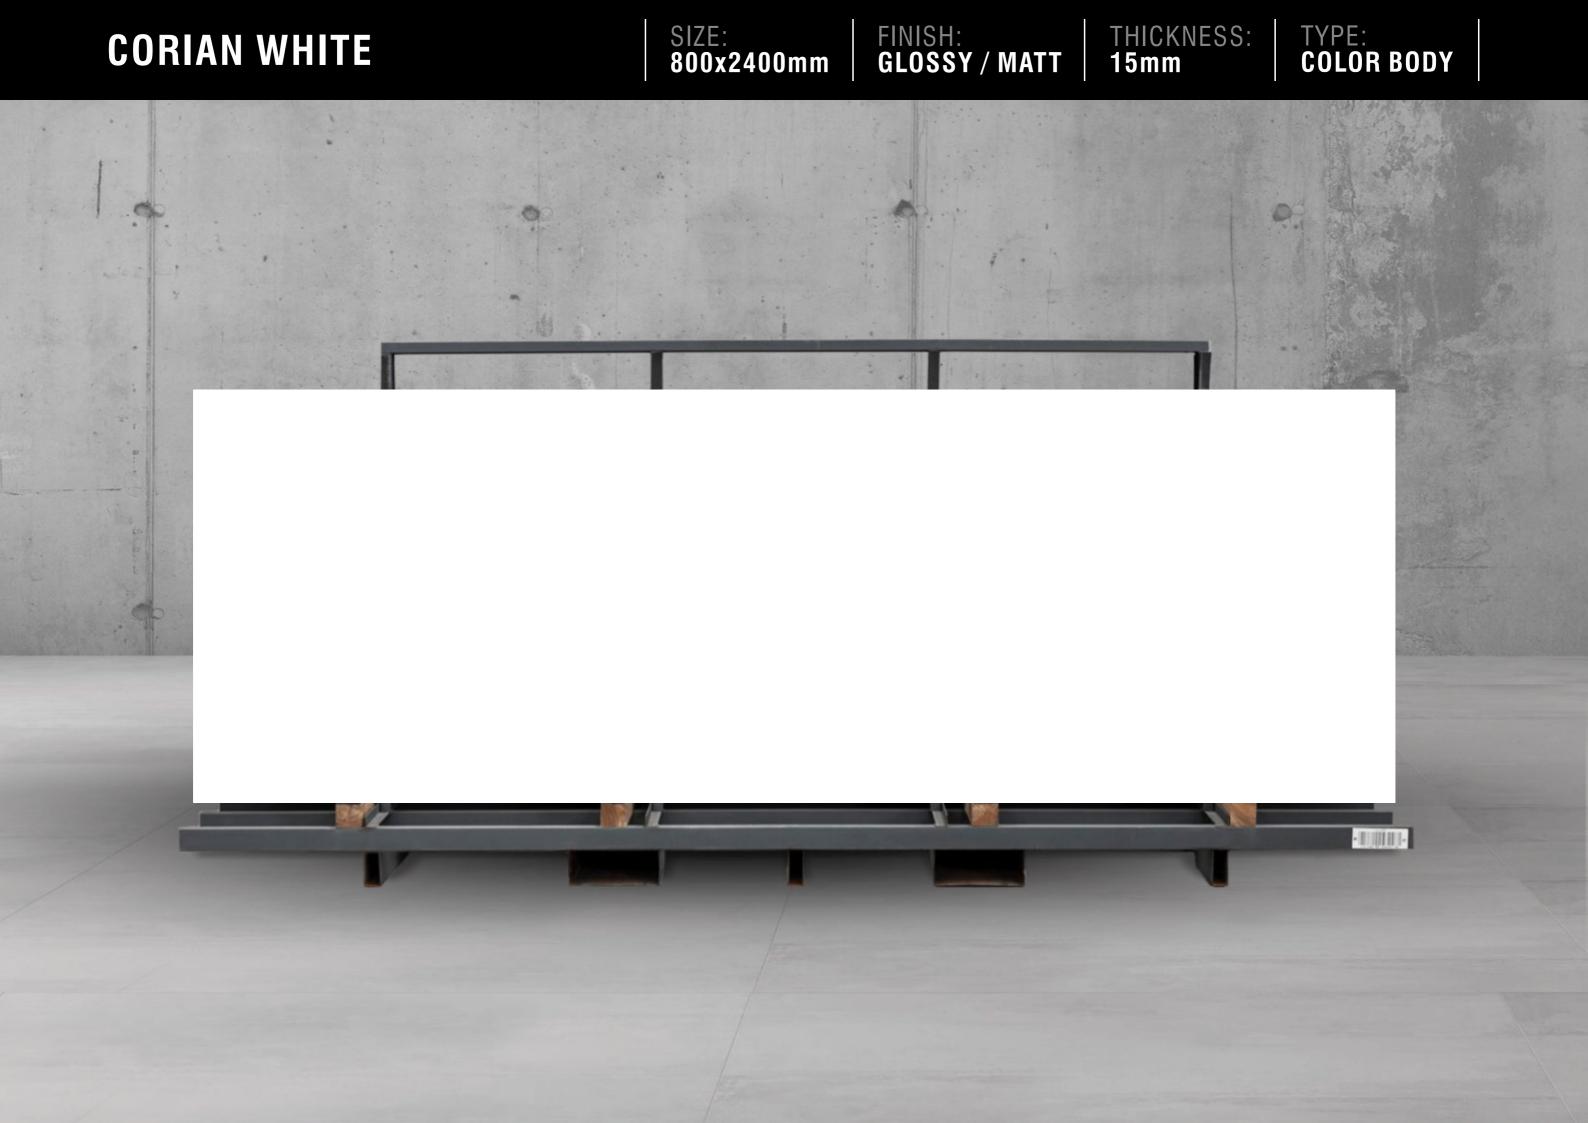




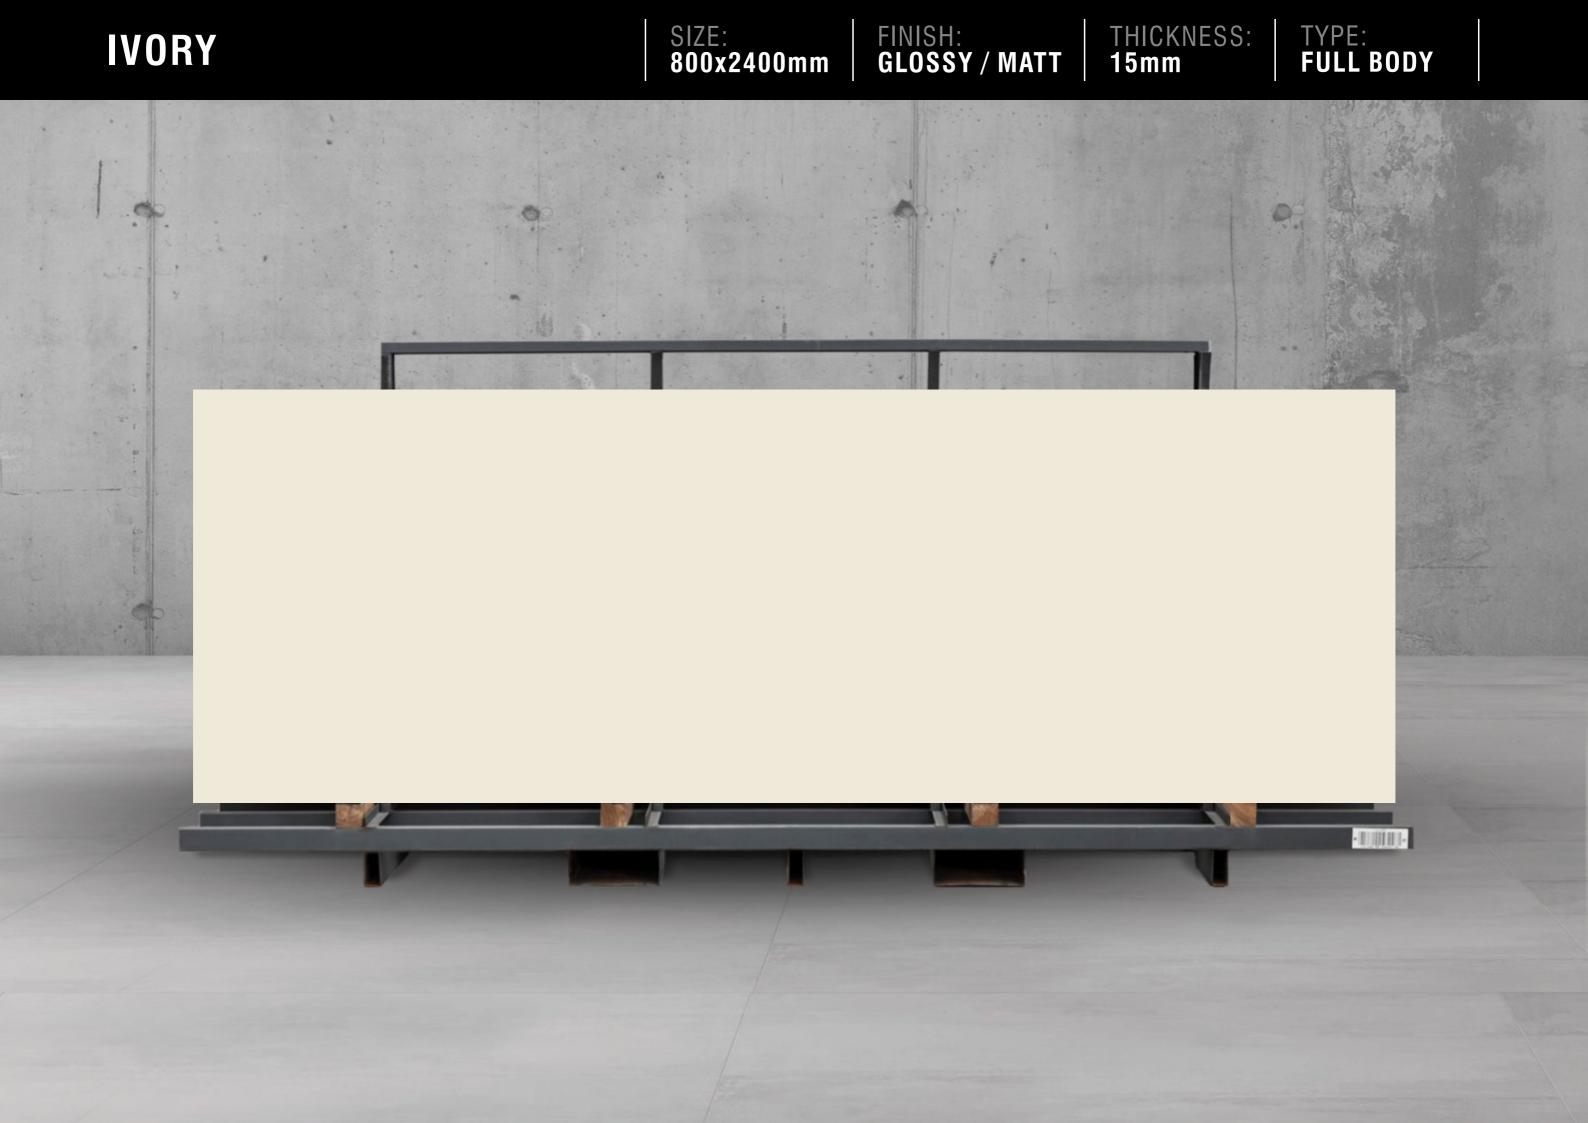



FINISH: GLOSSY / MATT THICKNESS: **15mm** TYPE: **FULL BODY** SIZE: 800x2400mm OLIVE ·minimi




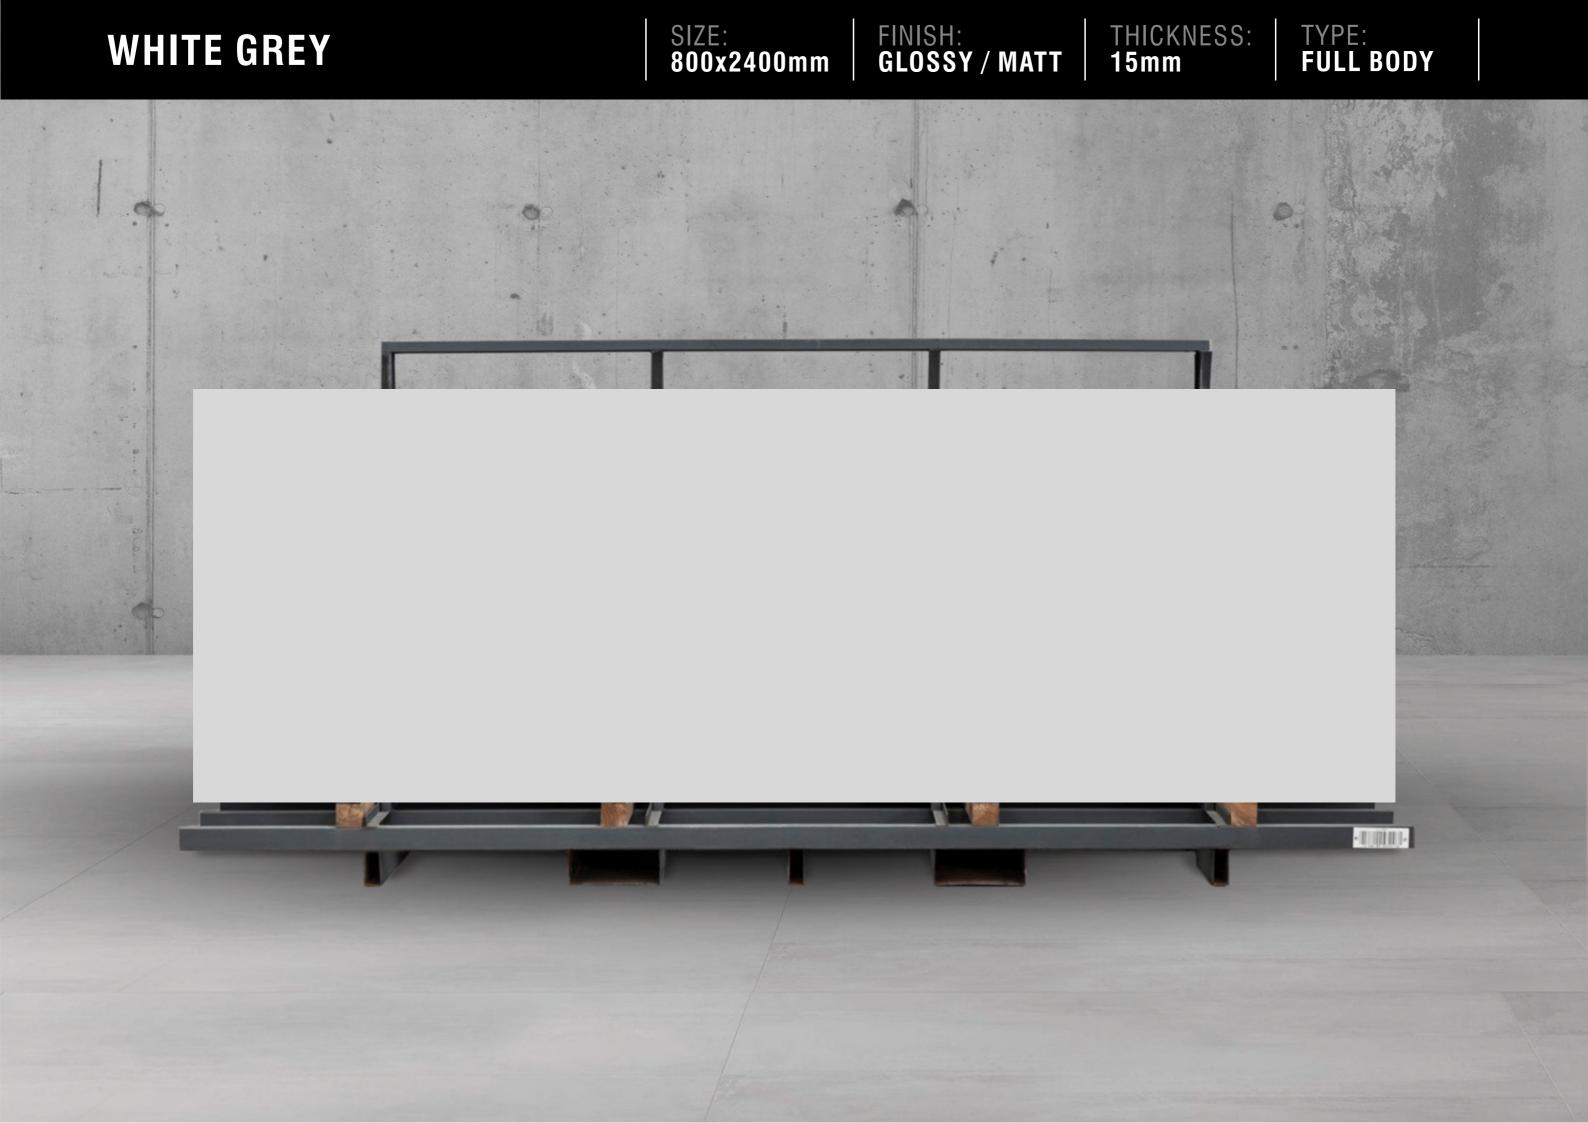



FINISH: GLOSSY / MATT THICKNESS: **15mm** TYPE: **FULL BODY** SIZE: 800x2400mm **SOLID GREY** ·




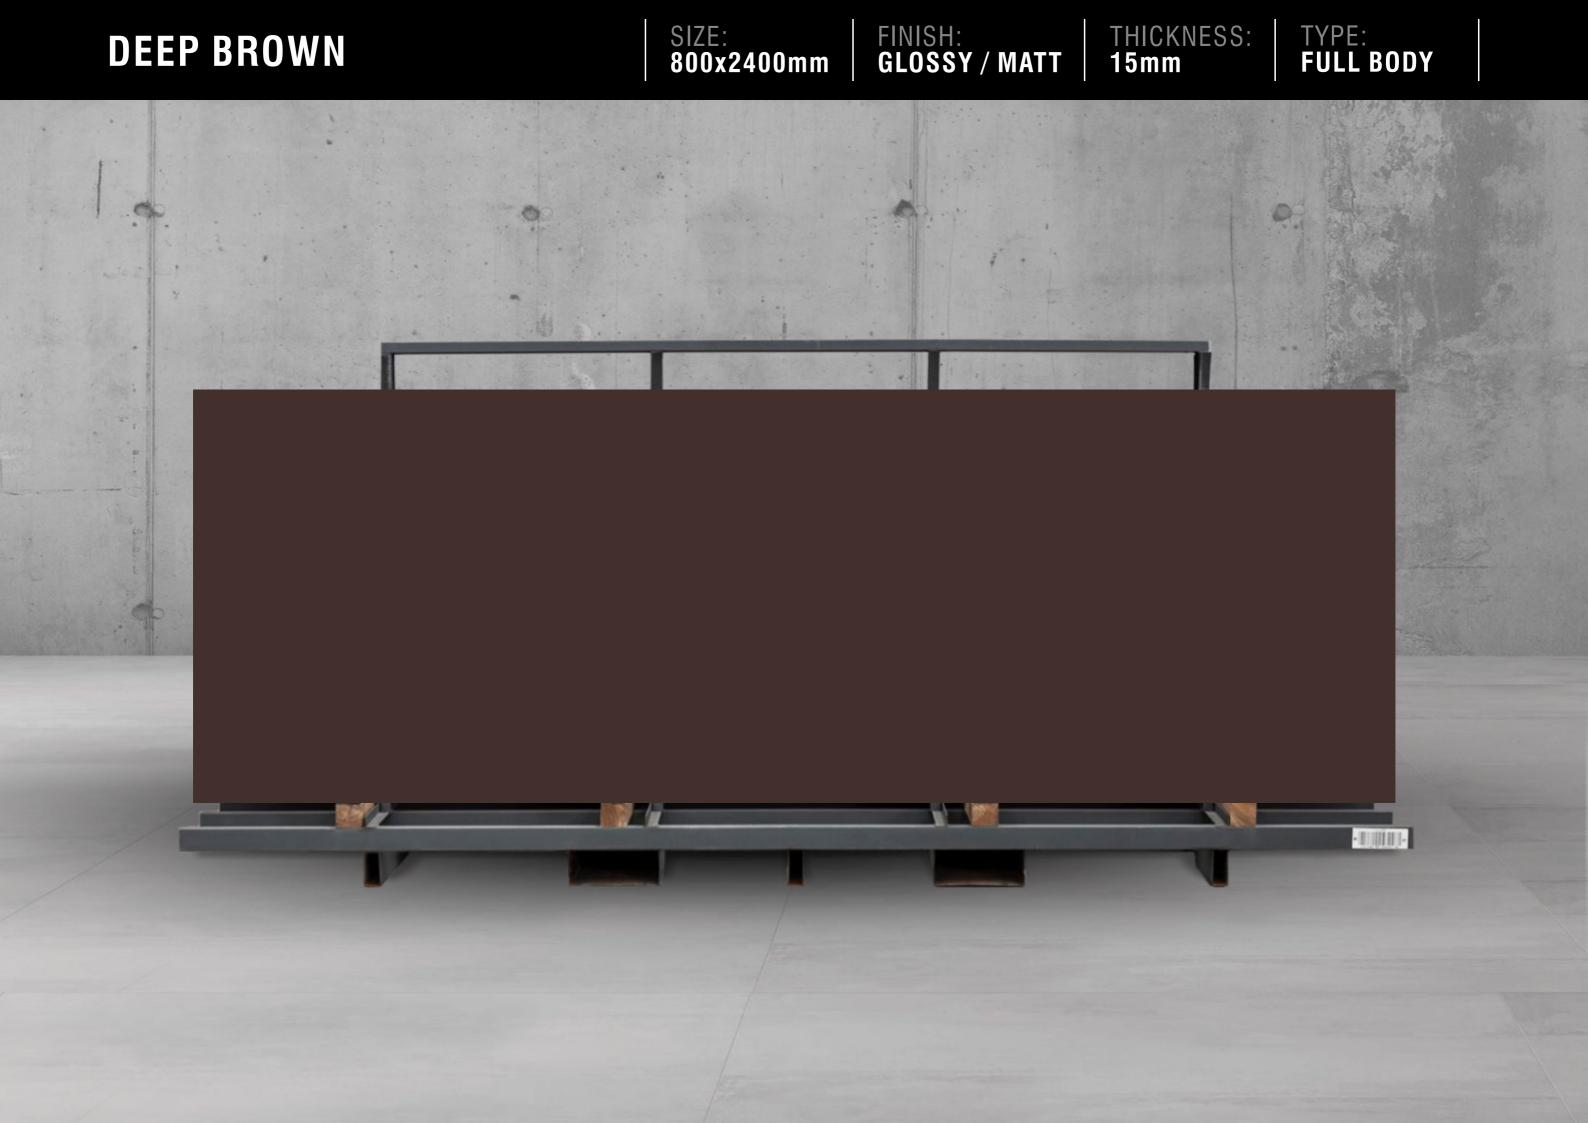



THICKNESS: **15mm** TYPE: COLOR BODY SIZE: 800x2400mm FINISH: GLOSSY / MATT **JET BLACK** -100000



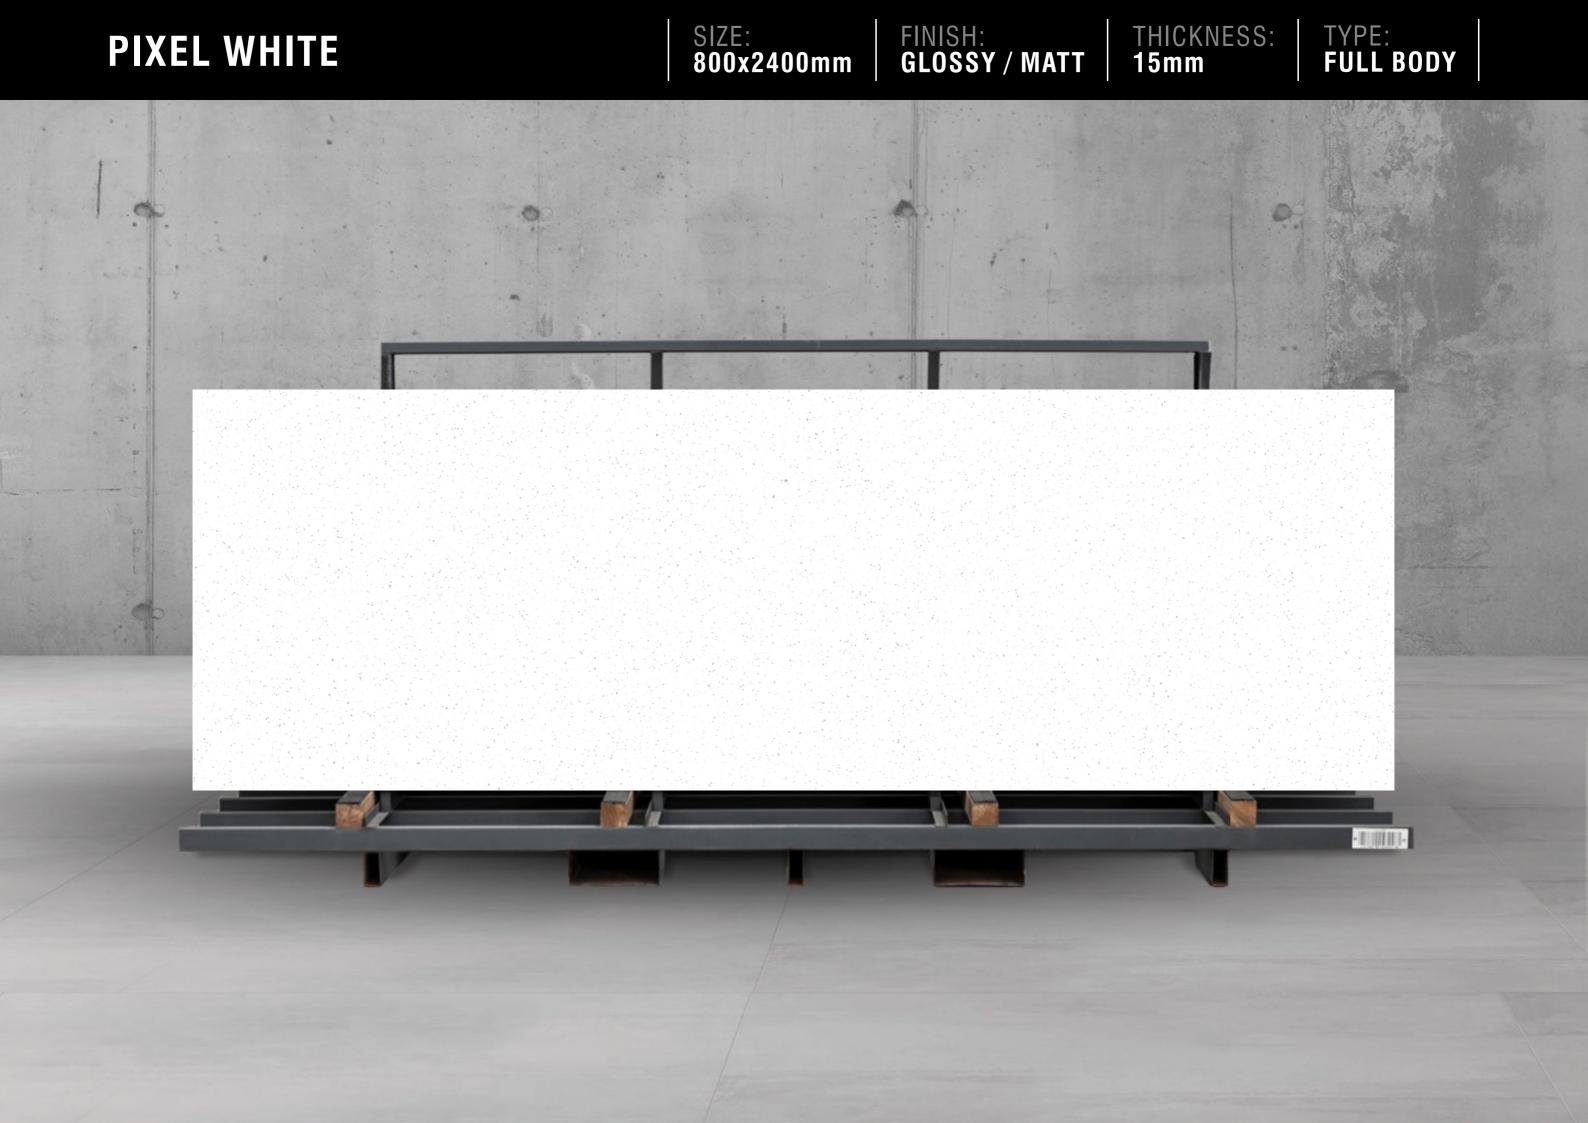







FINISH: GLOSSY / MATT THICKNESS: 15mm TYPE: **FULL BODY** SIZE: **800x2400mm** PIXEL BROWN 








FINISH: GLOSSY / MATT THICKNESS: 15mm TYPE: **FULL BODY** SIZE: **800x2400mm PIXEL VERDE** 



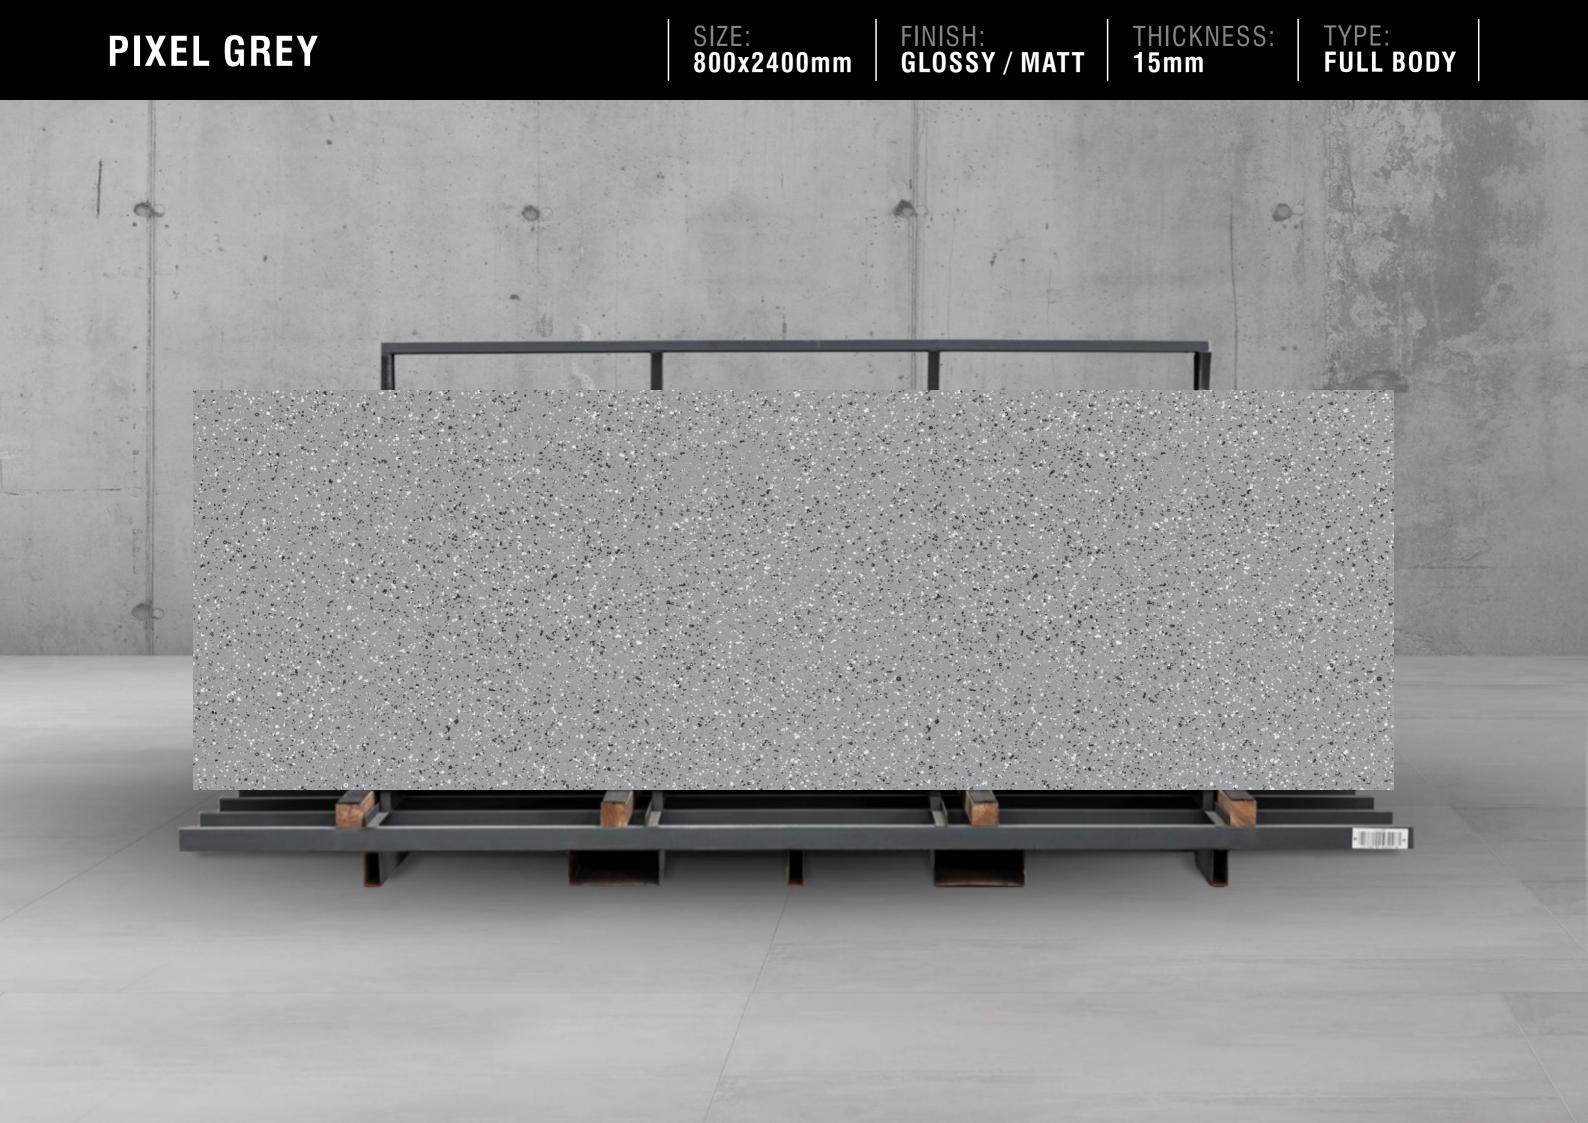



**PIXEL BLACK** 

SIZE: 800x2400mm FINISH: GLOSSY / MATT

THICKNESS: 15mm TYPE: **FULL BODY** 






## TECHNICAL SPECIFICATIONS

SIZE: 800x2400mm

## EDGE PROFILES

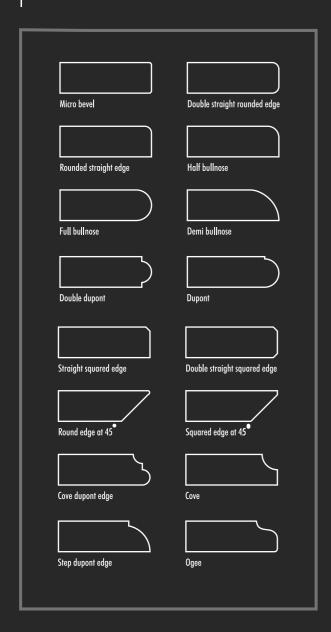

CHARACTERISTICS	STANDARD AS PER ISO-13006/En14411 GROUP	VALUES	TEST METHOD
	REGULATORY PE	ROPERTIES	
Deviation in Length & Width	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545 <b>-</b> 2
Deviation in Thickness	<u>+</u> 5%	<u>+</u> 5%	ISO 10545 <b>-</b> 2
Straightness of Sides	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545 <b>-</b> 2
Rectangularity	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545 <b>-</b> 2
Surface Flatness	<u>+</u> 0.5%	<u>+</u> 0.3%	ISO 10545 <b>-</b> 2
Color Difference	ΔE<1.00	△E<0.30	ISO 10545 <b>-</b> 16
Glossiness	As per Mfg.	>90%	Gloss Meter 60
	STRUCTURAL PI	ROPERTIES	
Water Absorption	≤0.5 %	<u>≤</u> 0.06 %	ISO 10545 <b>-</b> 3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545 <b>-</b> 3
	MASSIVE MECHANIC	AL PROPERTIES	
Modulus of Repture	Min 35N/mm²	 Min.40N/mm²	ISO 10545 <b>-</b> 4
Breaking Strength	Min. 1300 N	Min. 7200 N	ISO 10545 <b>-</b> 4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545 <b>-</b> 4
	SURFACE MECHANIC	AL PROPERTIES	
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545 <b>-</b> 7
Moh's Hardness	As per Mfg.	Min. class 4	BS EN 15771
	THERMO HYGROMETI	RIC PROPERTIES	
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545 <b>-</b> 12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545 <b>-</b> 9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545 <b>-</b> 10
Thermal Expansion	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.0x10 <sup>-6</sup>	ISO 10545 <b>-</b> 8
	CHEMICAL PRO	OPERTIES	
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545 <b>-</b> 13
Stain Resistance	Resistant	Resistant	ISO 10545 <b>-</b> 14
	SAFETY PROI	PERTIES	
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

TILE SIZE	THICKNESS	NO. OF TILES/BOX	WEIGHT/BOX (approx.)	COVERAGE AREA
800 X 2400mm	15 mm	1 Pcs	67 kg.	20.67 Sq. Ft.