
THE IRRESISTIBLE STYLE OF MARVELOUS SLABS



800x1600MM


DARK HIGHGLOSS



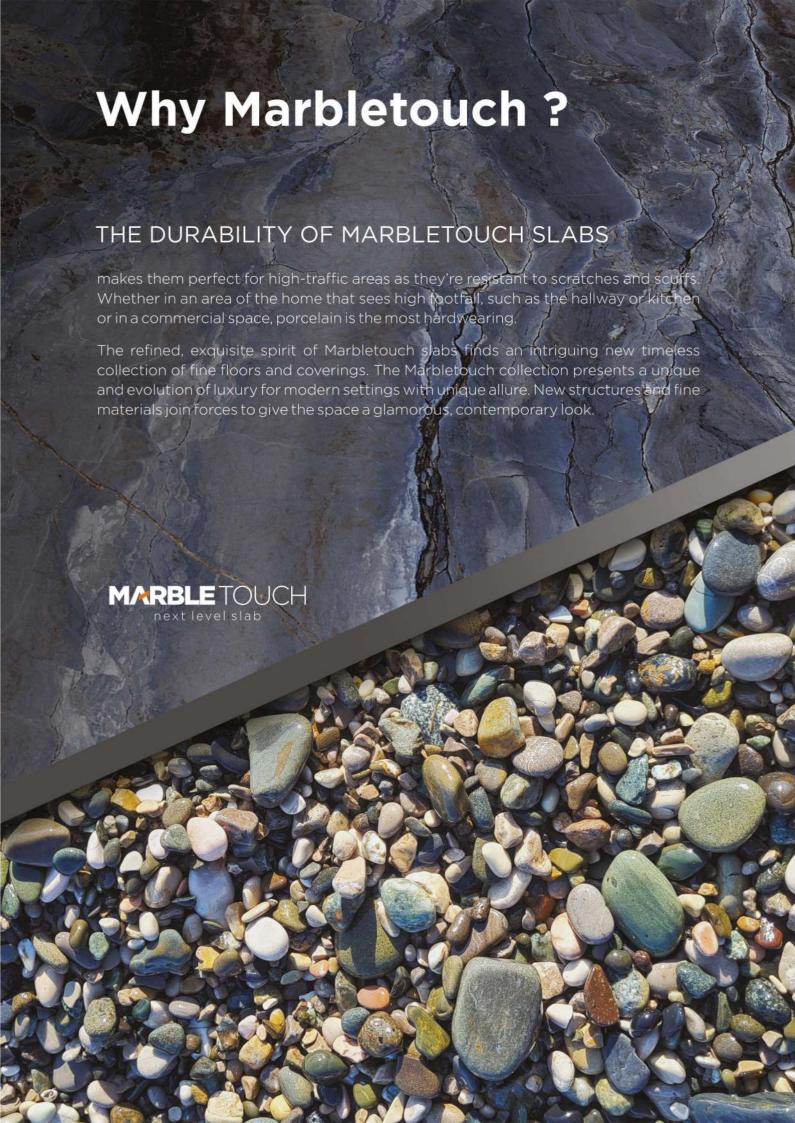


ALASKA WHITE



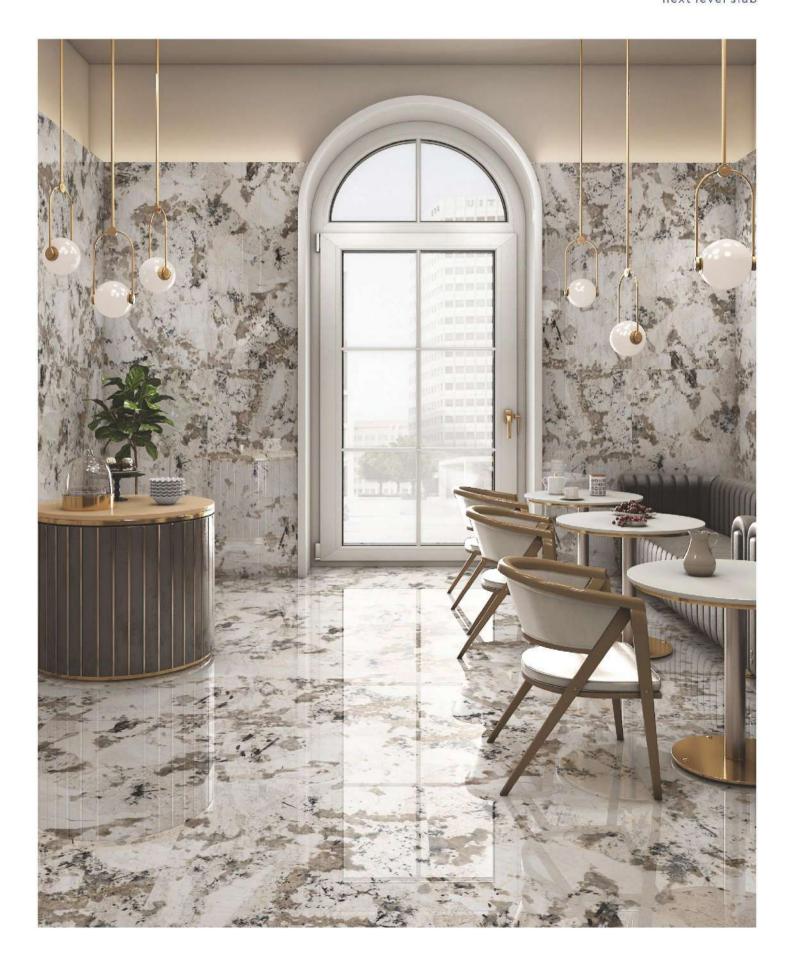

AMARULA BLUE

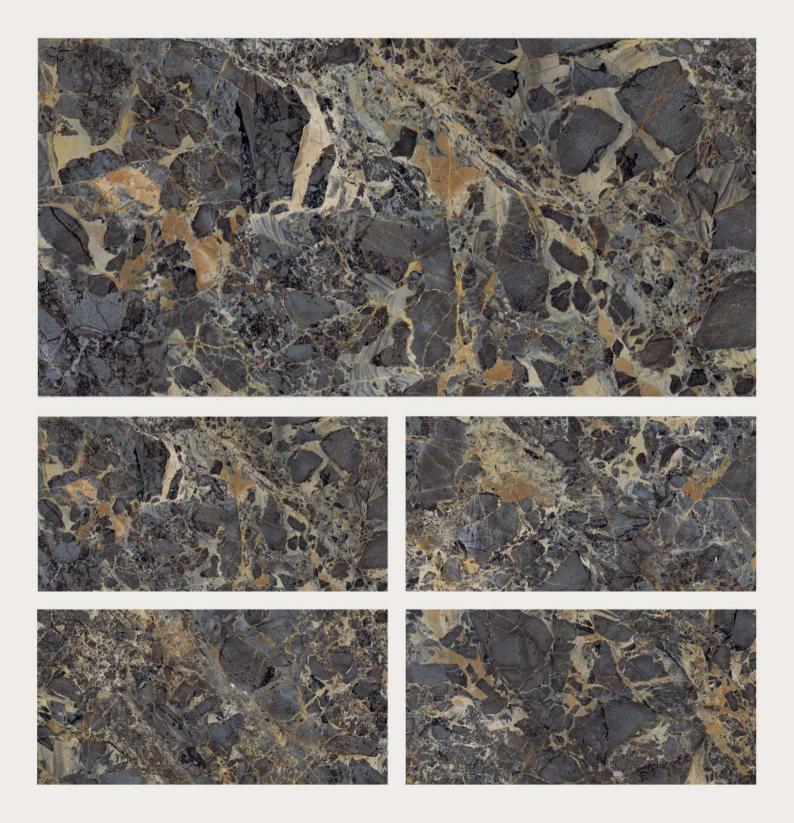

AMARULA CHOCO




AMAZING GREEN





AMAZONITE VERDE

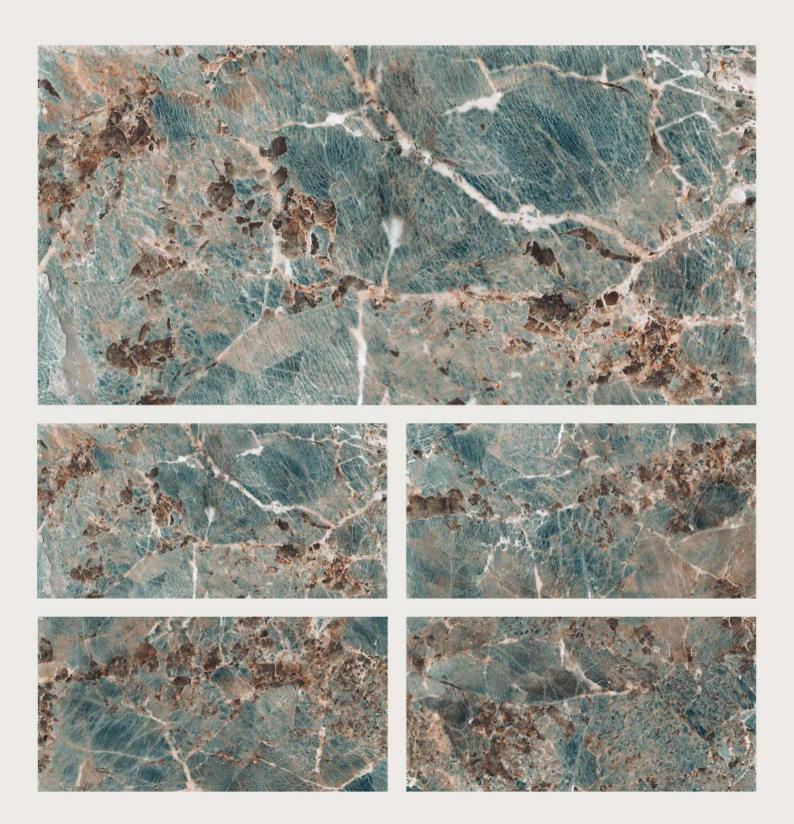





ARMA BRONZE




800x1600MM | 32"X64"


BASIL BLUE



BLACK PANDA

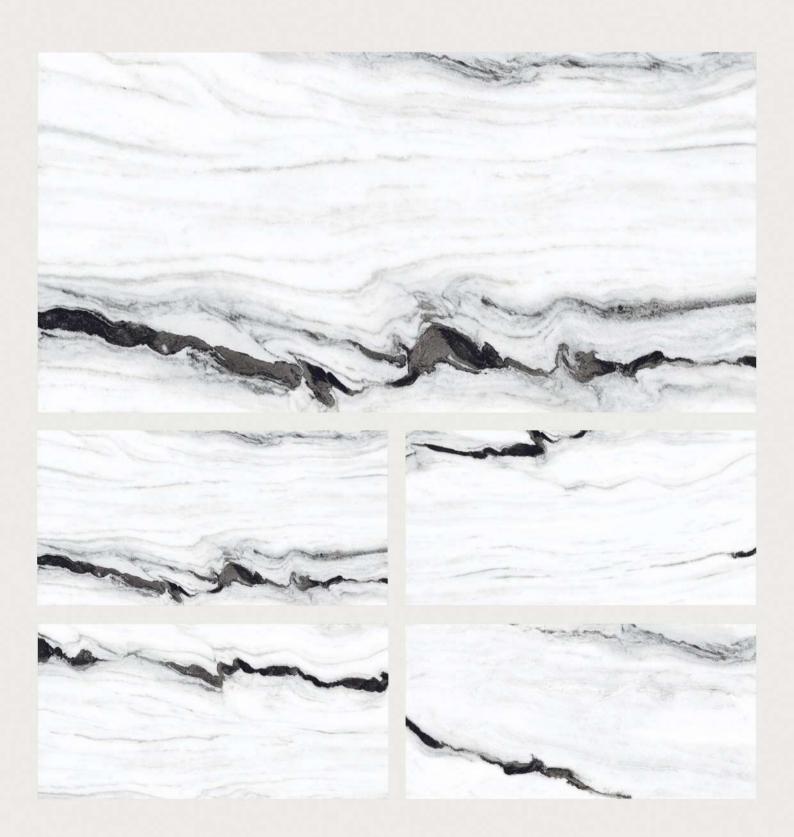

BLUZEE CRYSTAL

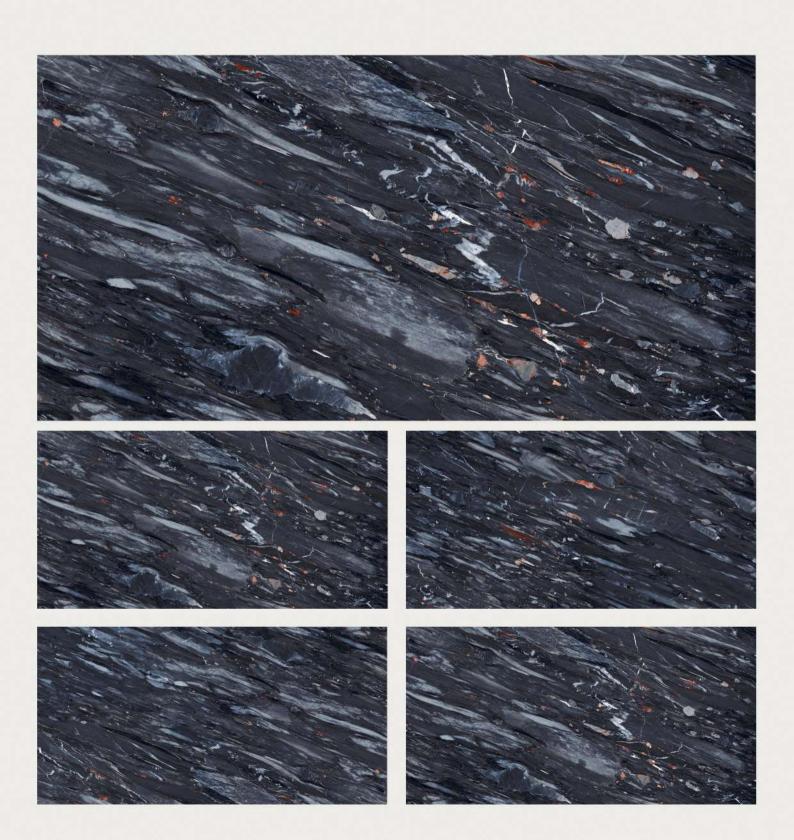






BLUZEE SAGE







CAMELOT TORQUOISE

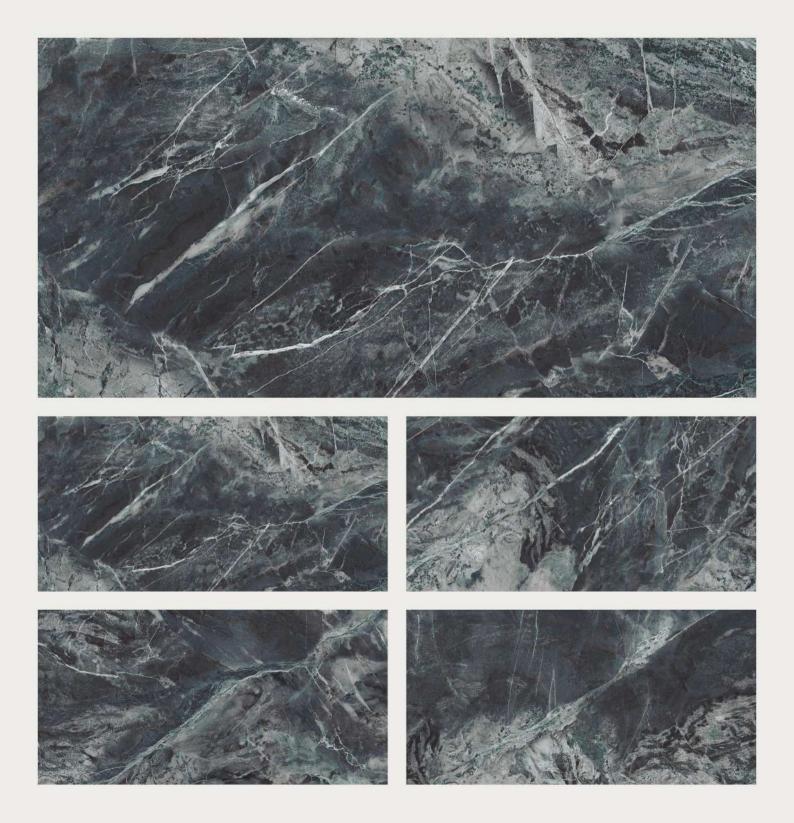


CAMLOT NEON

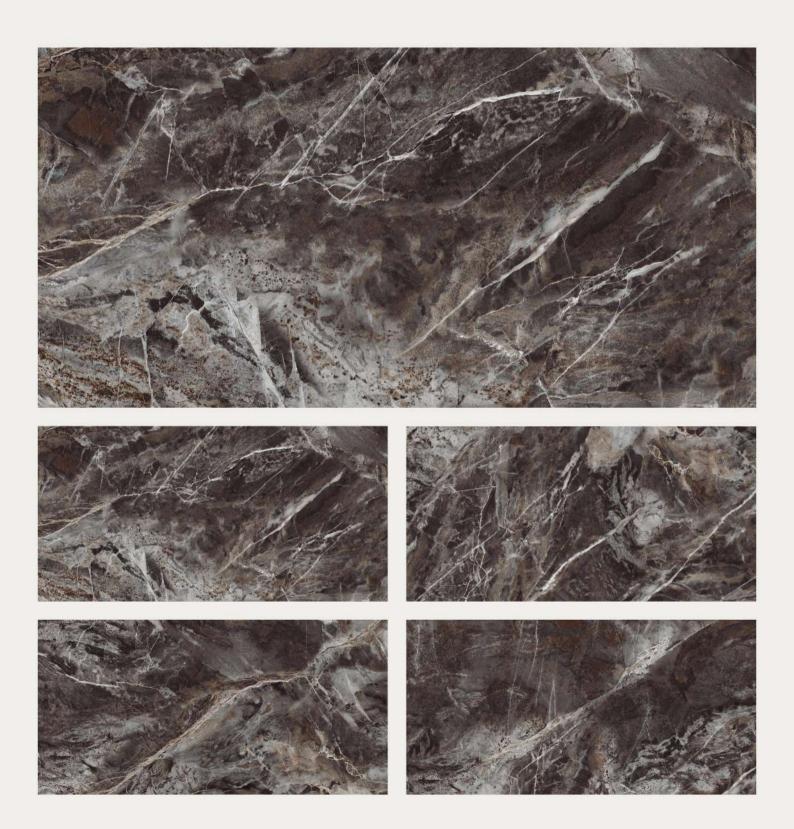

CANOVA AMBER

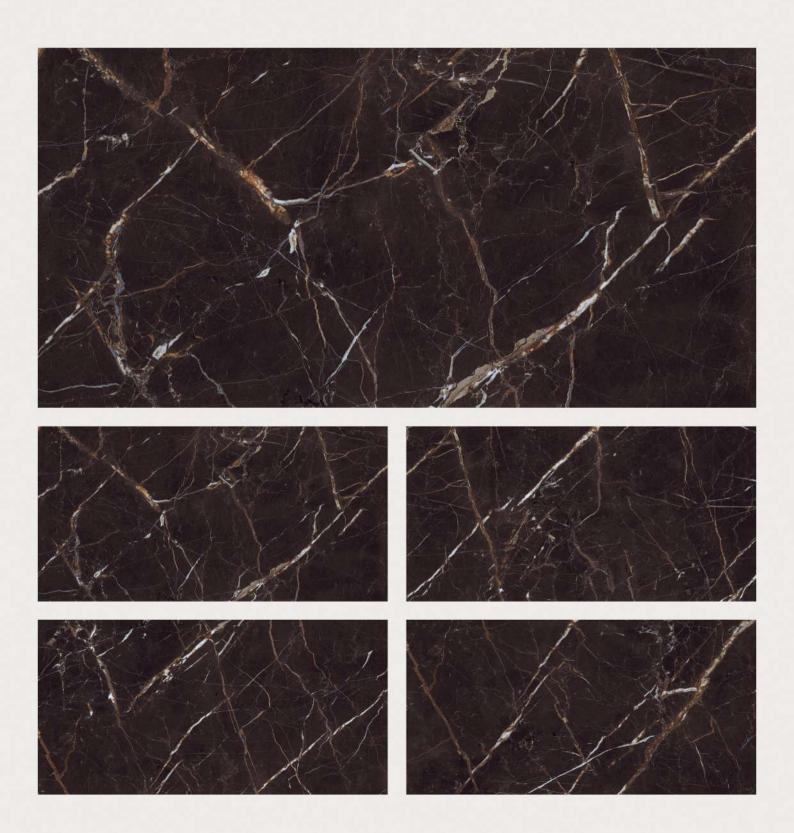




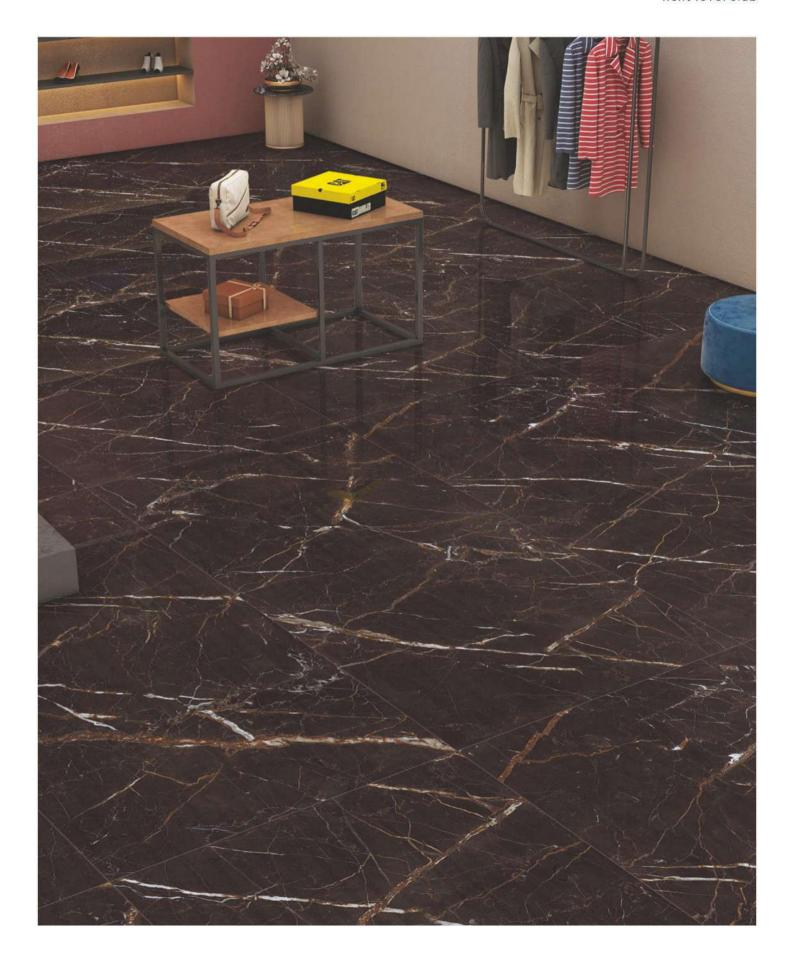

COSMIC BLACK




COSMIC BLUE

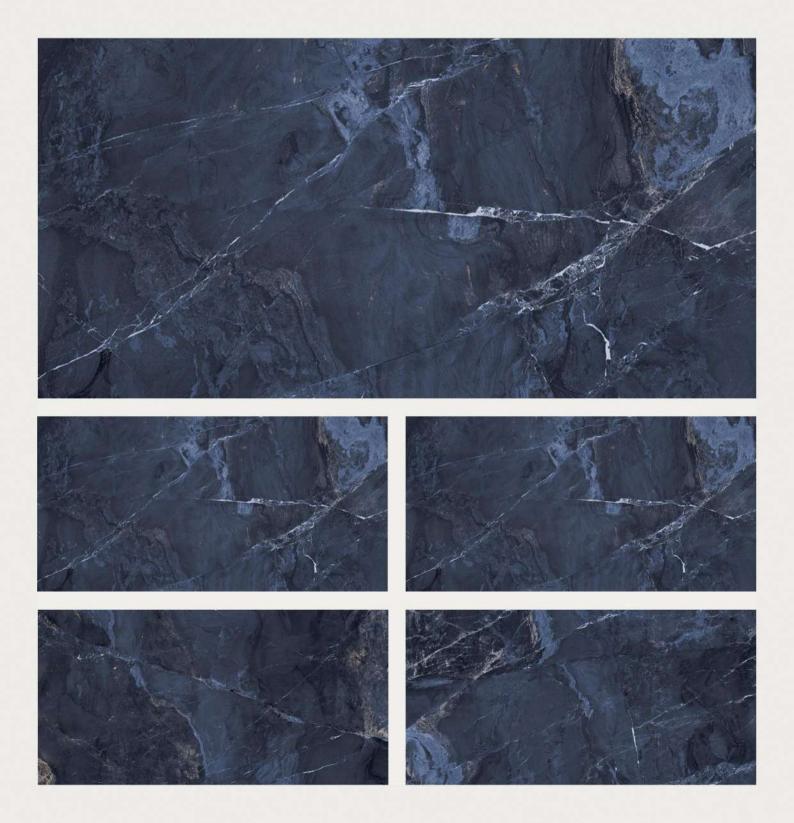



DRAGO AQUA



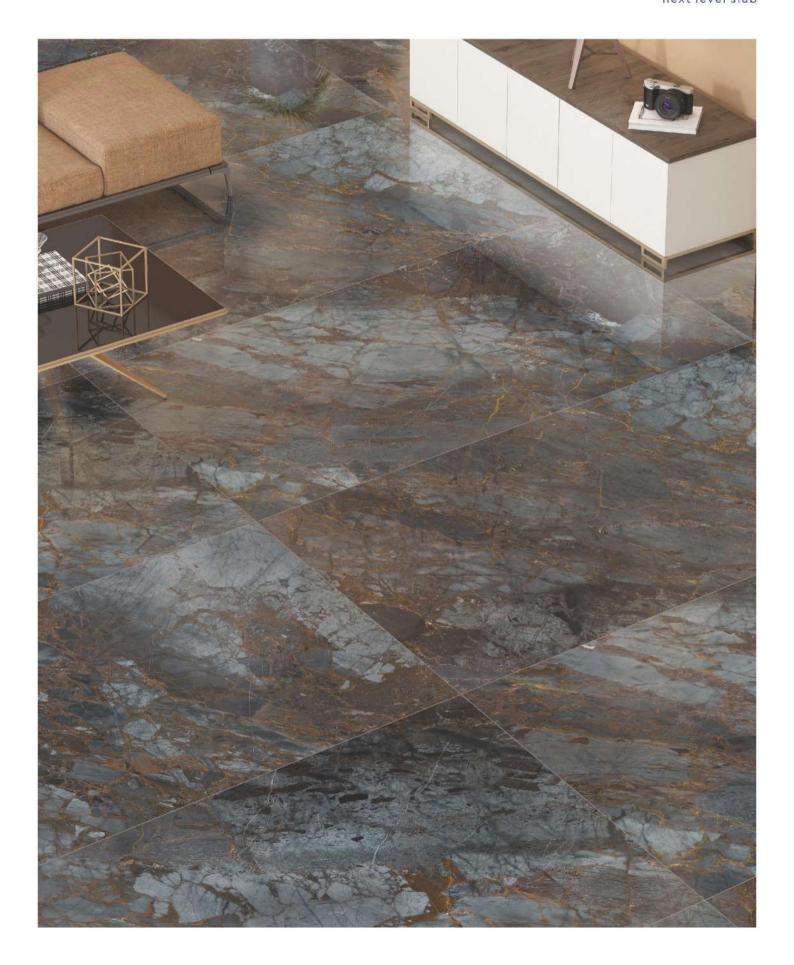

DRAGO BLUE

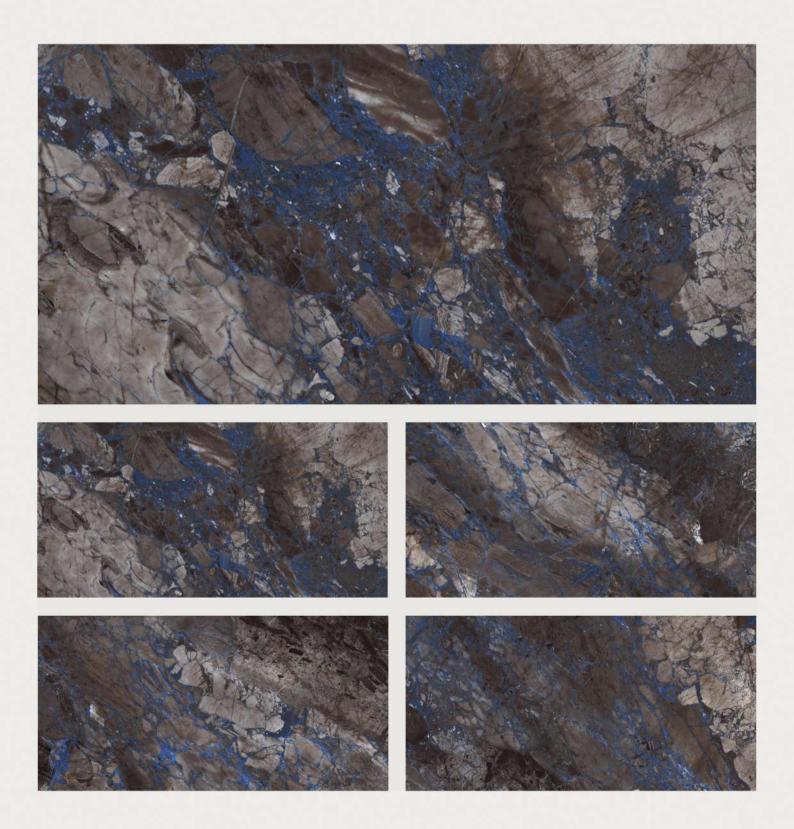


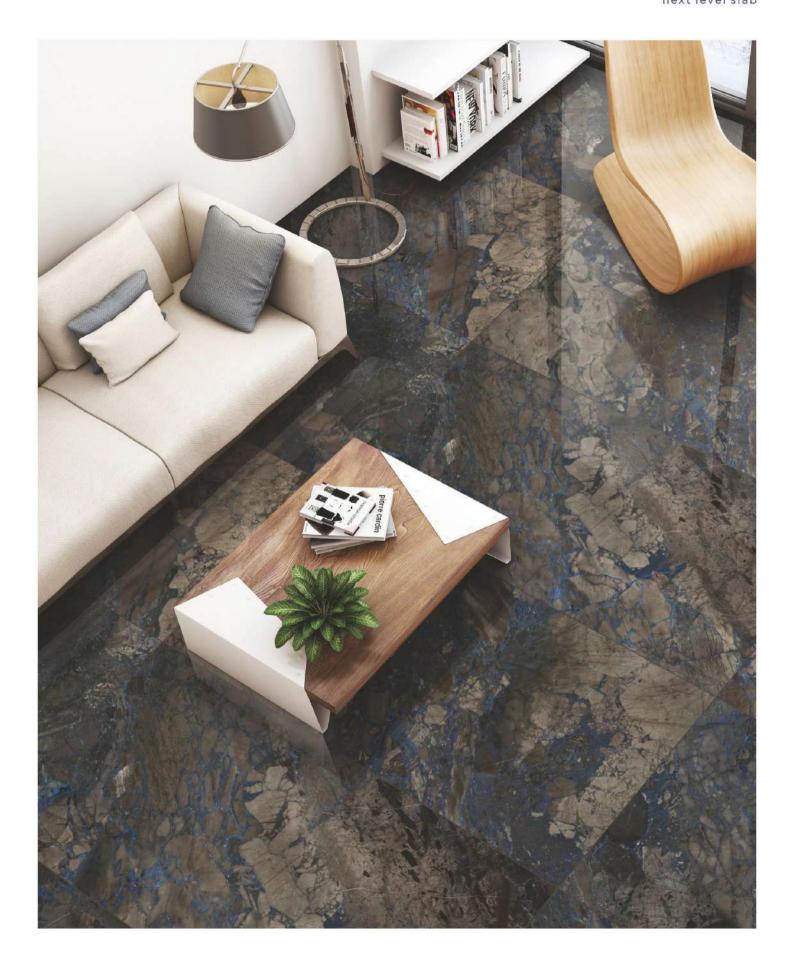

EAGLE BLUE



EAGLE BROWN

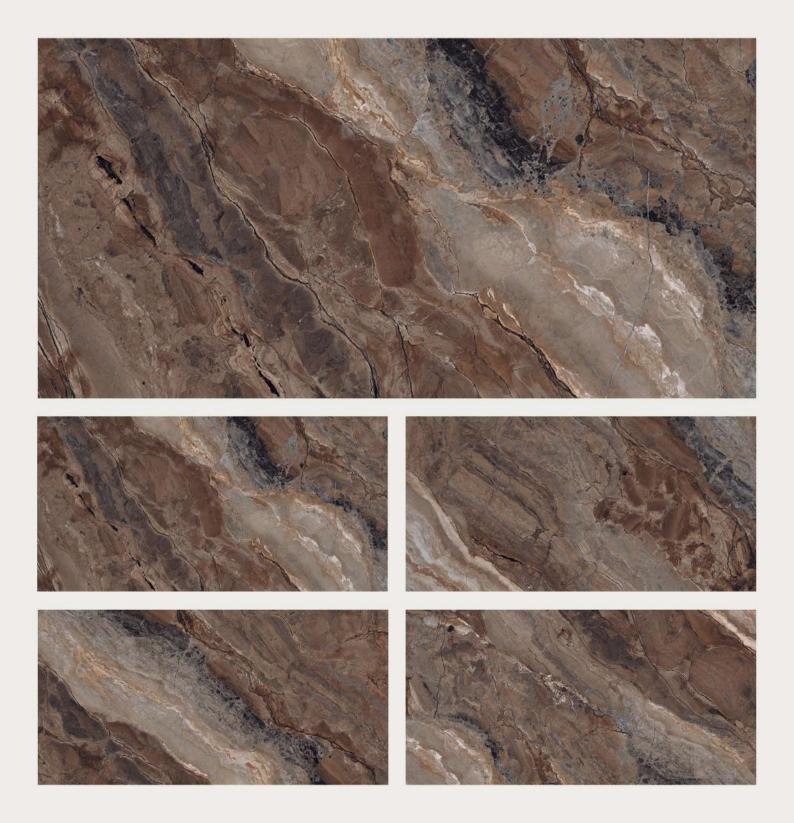





800x1600MM | 32"X64"

EMIRALD AQUA








FLORIAN ICE





800x1600MM | 32"X64"

FOSSIL NERO

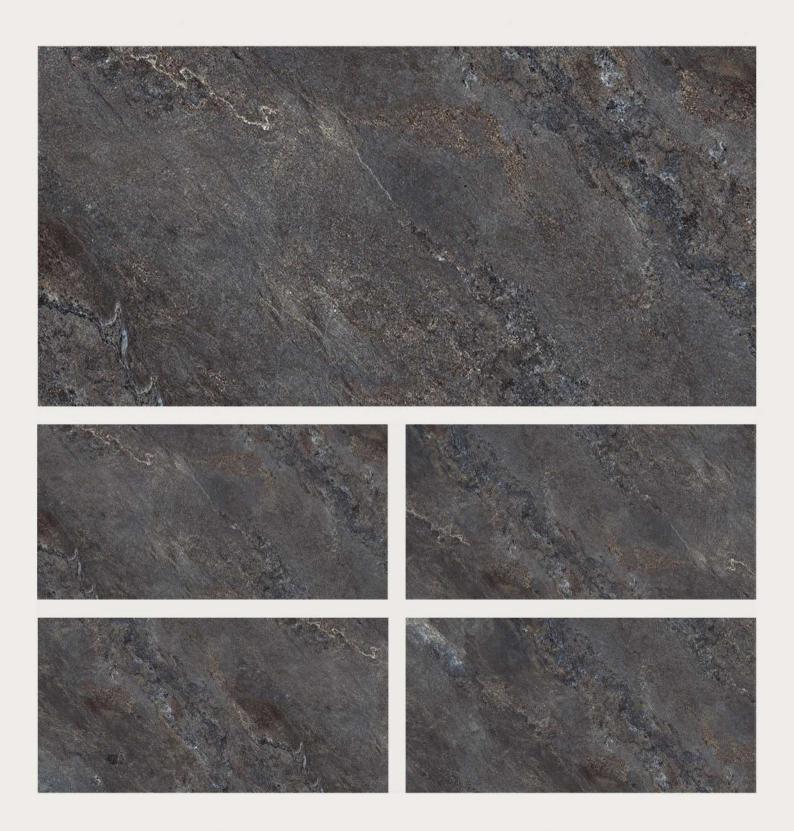

800x1600MM | 32"X64"

GLAMOUR AZUL




800x1600MM | 32"X64"

GLAMOUR GOLD



GREEK NEGRO

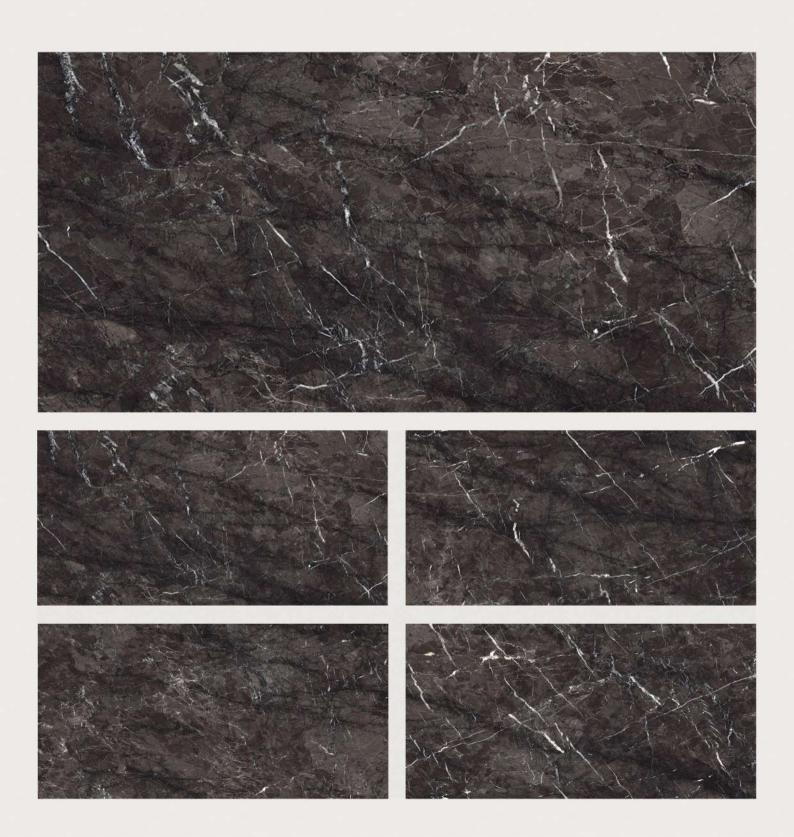

MARBLE TOUCH next level slab



LAPONIA NEGRO








LEMOORIANO BLACK




MARBLE TOUCH next level slab

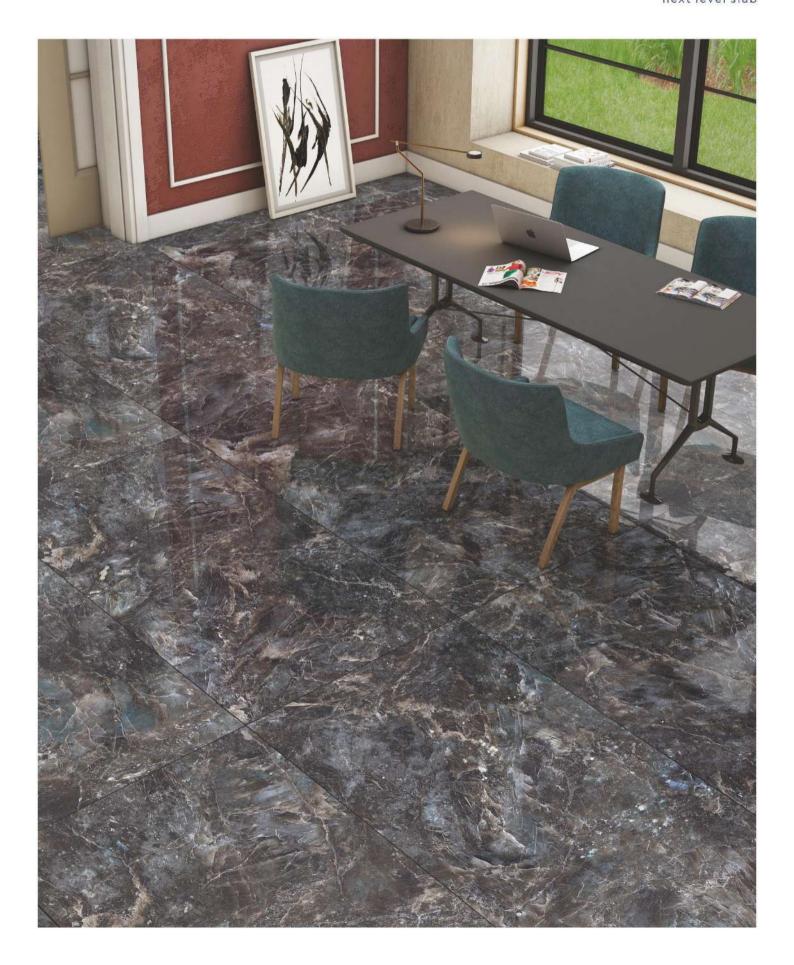

LEMOORIANO GREEN



LEMOORIANO STEEL

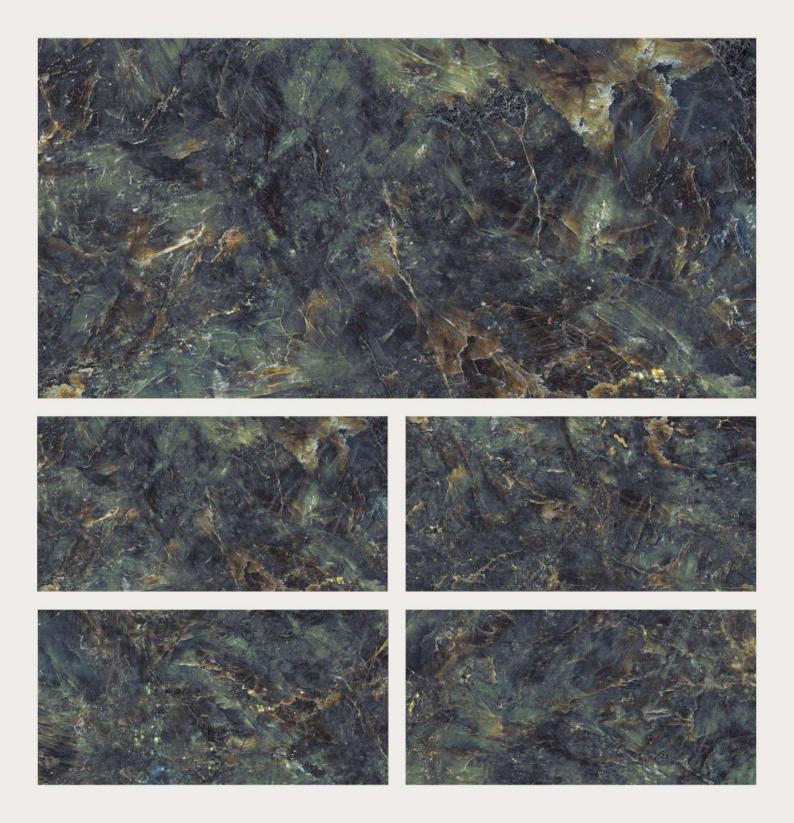

LIVON CHOCO




LIVON NERO




800x1600MM | 32"X64"


MIDAS ASH

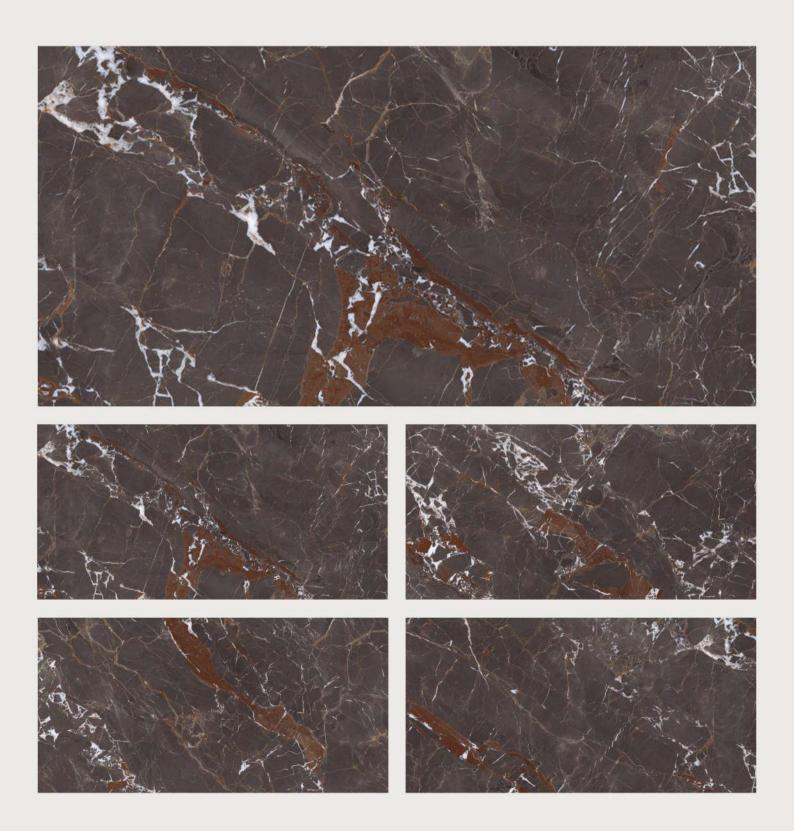

MARBLE TOUCH next level slab

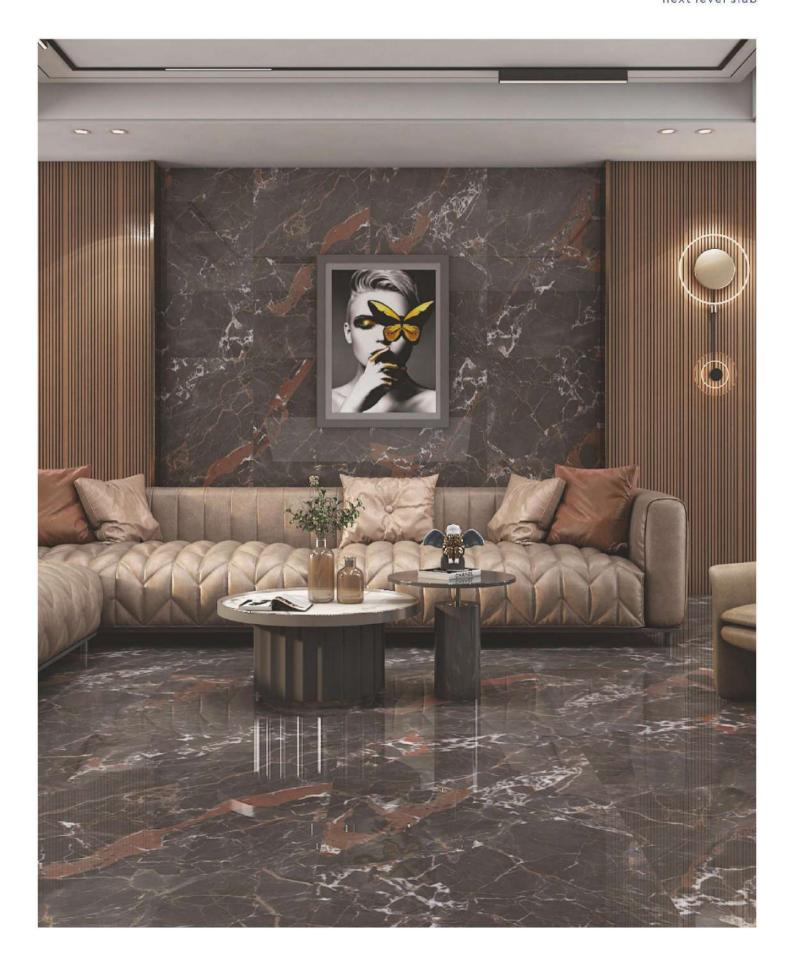

OPELO AQUA

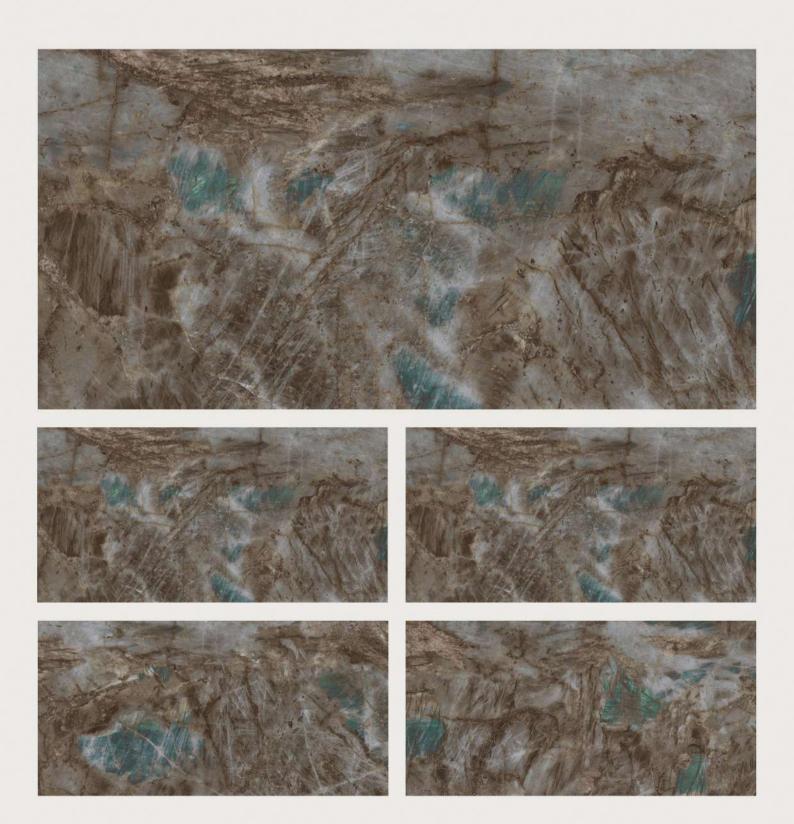





800x1600MM | 32"X64"

OPELO AZUL








ORABICO BLACK




ORABICO NEGRO

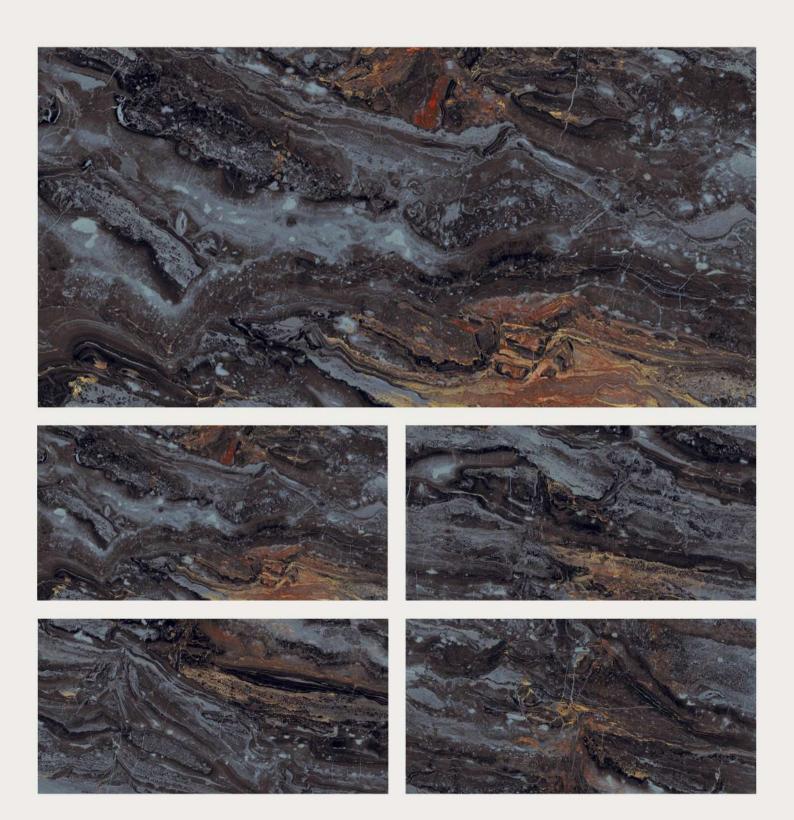


PARADISE GREY




PATAGONIA PERAL

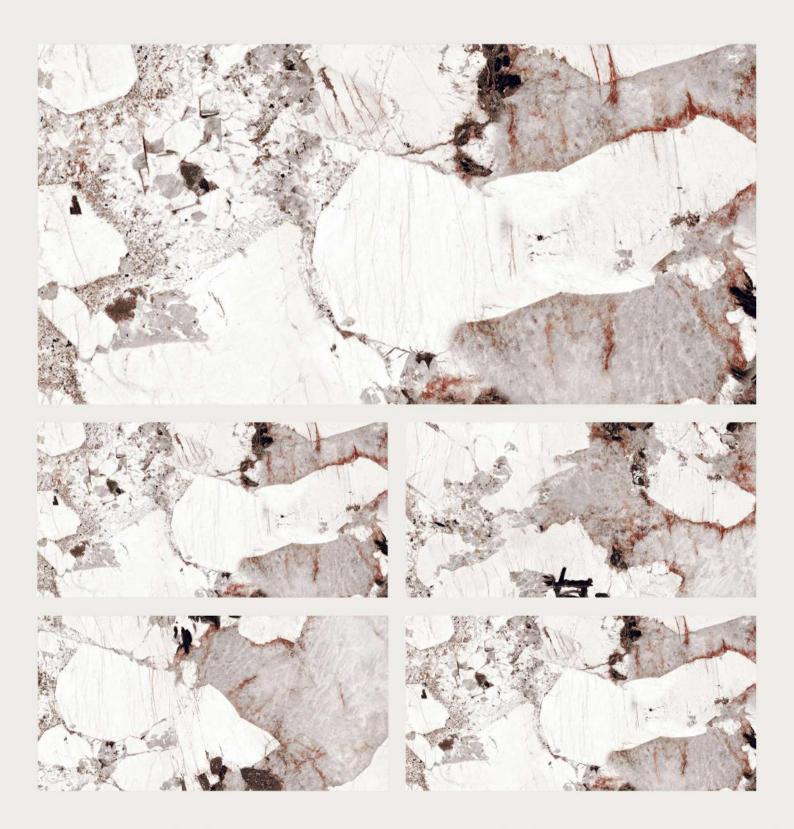


PETRACIA NEGRO

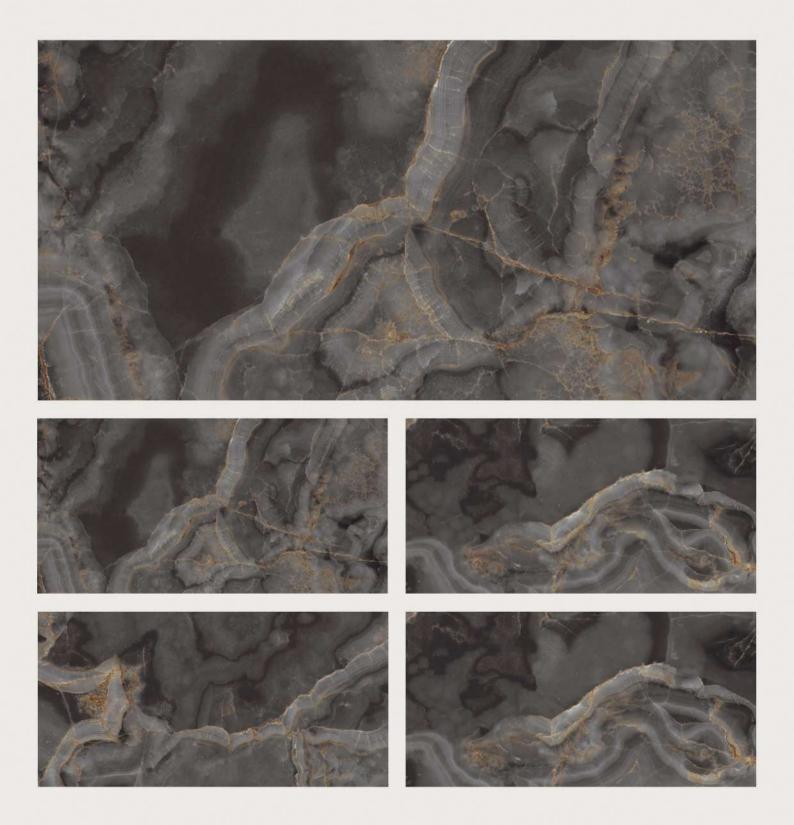

MARBLE TOUCH next level slab

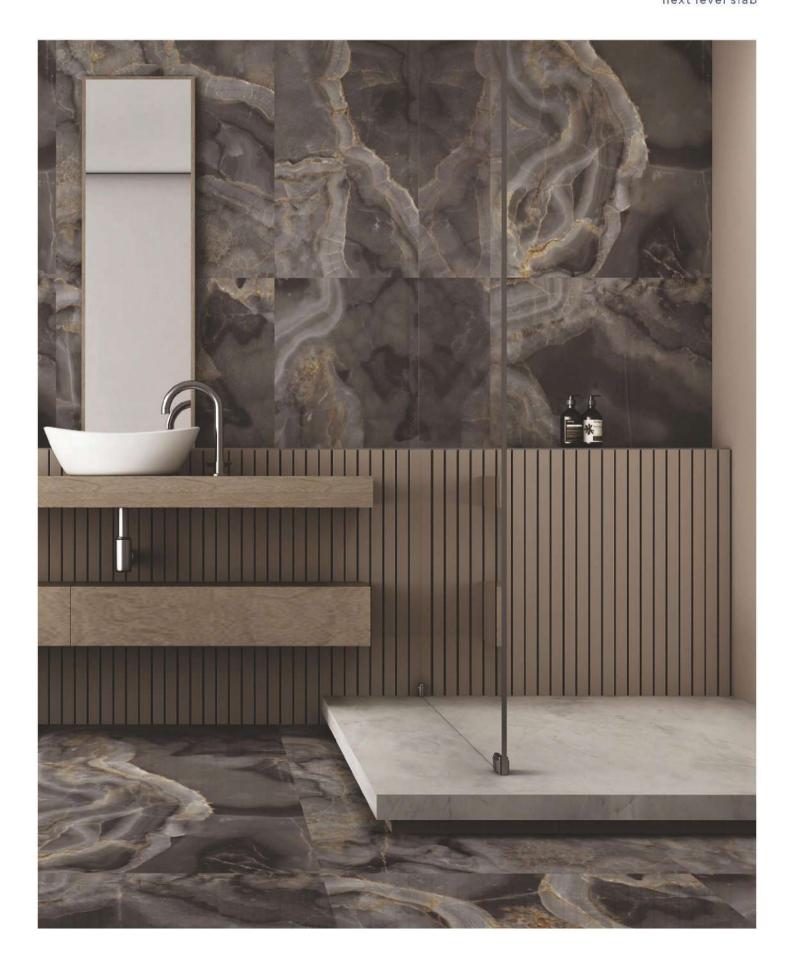

PETRACIA SILVER

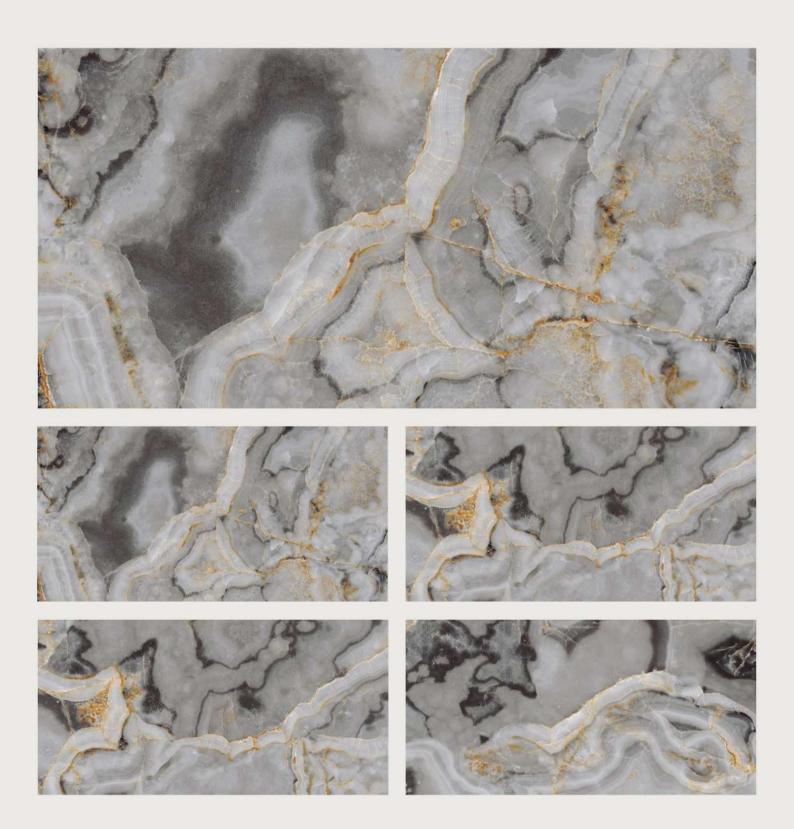

MARBLE TOUCH next level slab



800x1600MM | 32"X64"


PRISM ONYX








PULSE BROWN

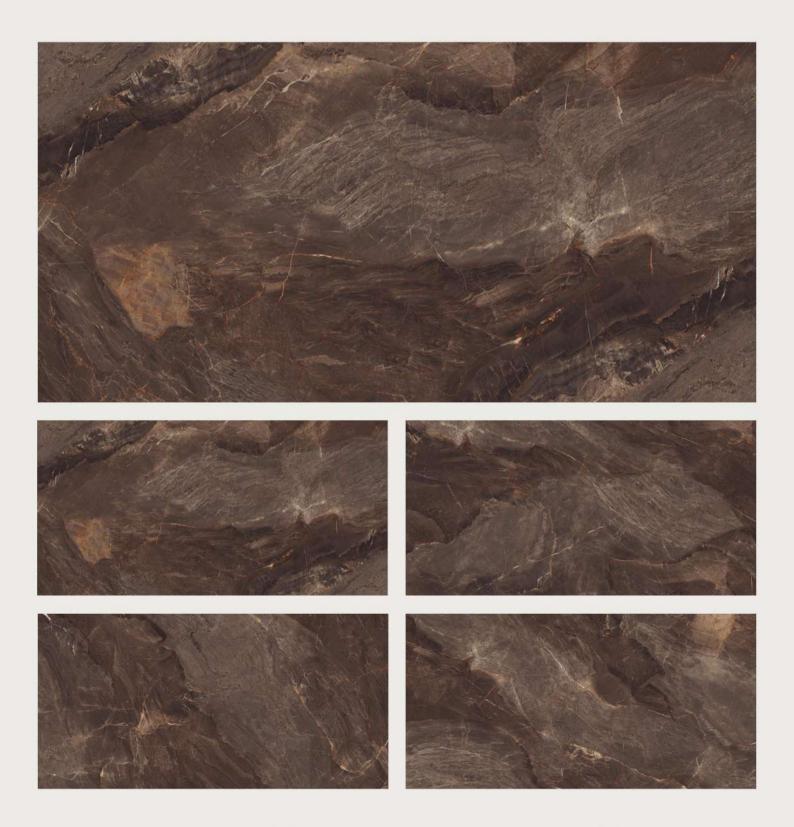

TITANO DENIM

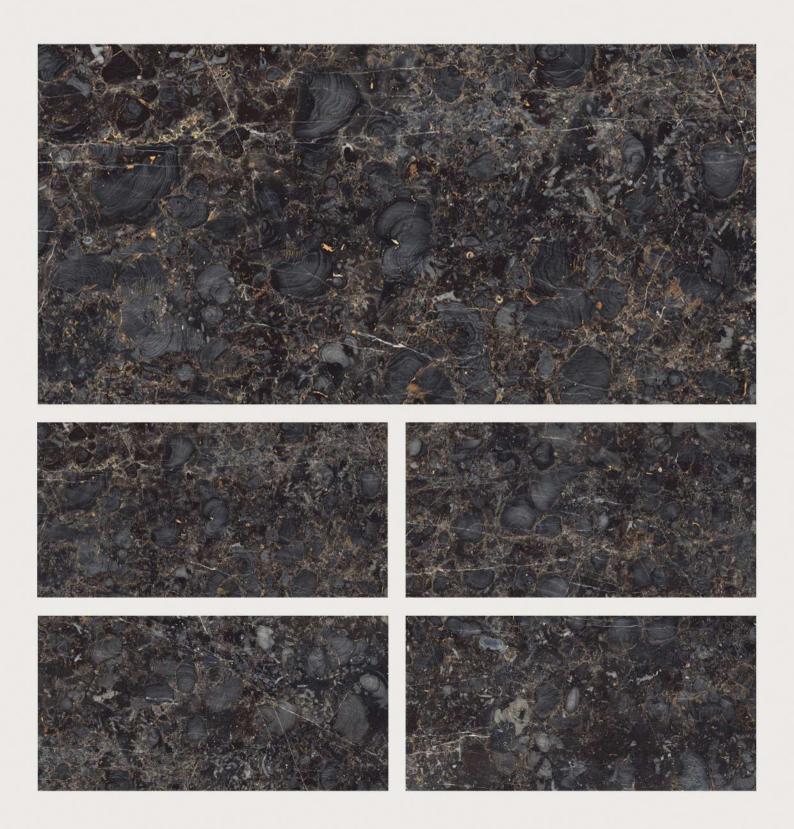

VALENCIA CHOCO



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER IS0-13006/EN14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES			T
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROF	PERTIES		L
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PRO	PERTIES		
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PRO	OPERTIES		
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10-6	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES		,	
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off	As per mfg	Does not yield	ISO-10545-15
by glazed tiles	7.to por ring	Pb & Cd	100 100 10

PACKING DETAILS

Size	Tiles / Box	Coverage Area / Box	Coverage Area / Box
800X1600MM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

