# THE IRRESISTIBLE STYLE OF MARVELOUS SLABS



800x1600MM

MATT CARVING



# Why Marbletouch?

### THE DURABILITY OF MARBLETOUCH SLABS

makes them perfect for high-traffic areas as they're resistant to scratches and scuffs. Whether in an area of the home that sees high footfall, such as the hallway or kitchen or in a commercial space, porcelain is the most hardwearing.

The refined, exquisite spirit of Marbletouch slabs finds an intriguing new timeless collection of fine floors and coverings. The Marbletouch collection presents a unique and evolution of luxury for modern settings with unique allure. New structures and fine materials join forces to give the space a glamorous, contemporary look.



# **ANTICO CREMA**



### **ANTICO WHITE**



# **ARMANI BIANCO**



# **ARMANI BRONZE**



### **ARMANI GREY**



### **ARMANI CREMA**



# **ATHLONE BEIGE**



# **BAYONA WHITE**



### **BERLINGTON BEIGE**



### **BERLINGTON GREY**





### **BERLINGTON NERO**







### **BERLINGTON SILVER**




### **BERLINGTON SMOKE**



### **BERLINGTON TAUPE**



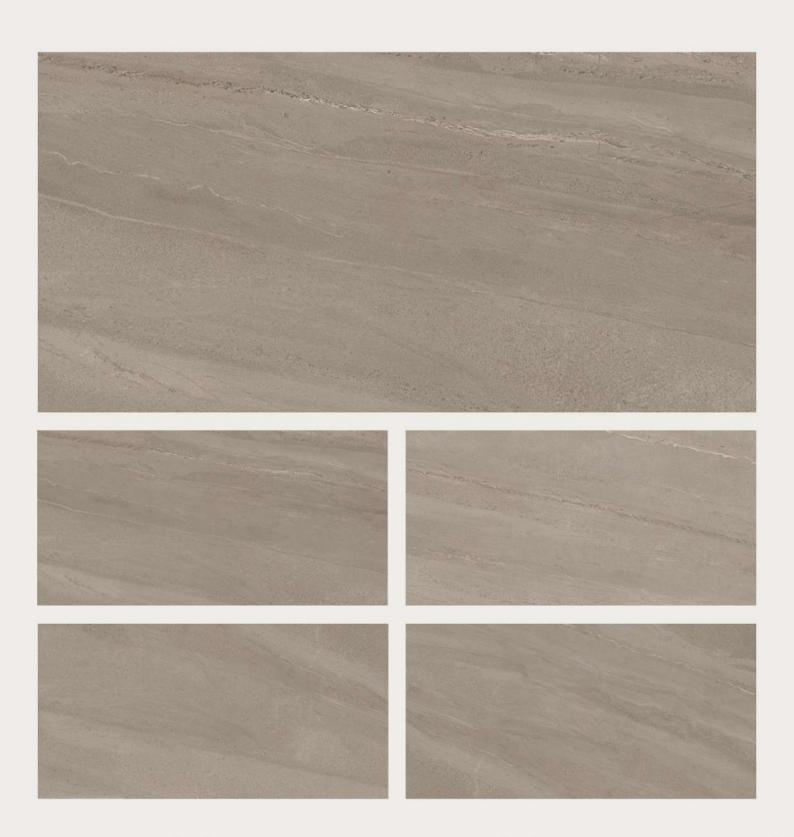

### **BRECIA CARNIS BEIGE**



# BRECIA



### **BYONA GREY**




# CALACUTTA BORGHINI AZUL



# **CALACUTTA BORGHINI**



# **CALACUTTA ORO**

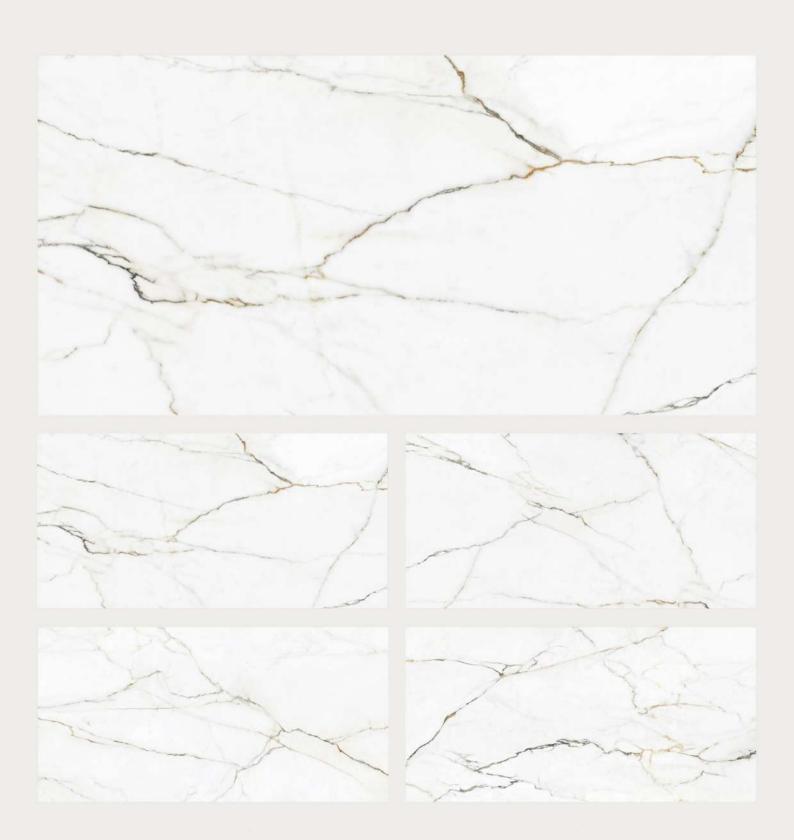

### **CANOVA WHITE**



# CARVISTA



# **CASTEL BIANCO**



# **CASTEL GREY**







# **CASTEL CREMA**




### **CONCRETE ASH**

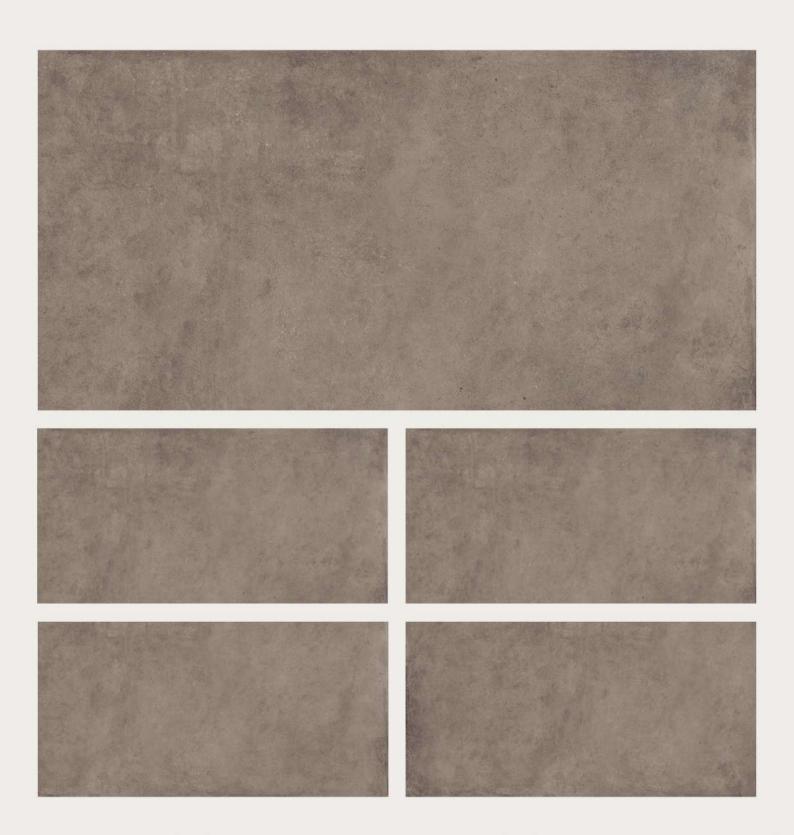


# **CONCRETE GREEK**

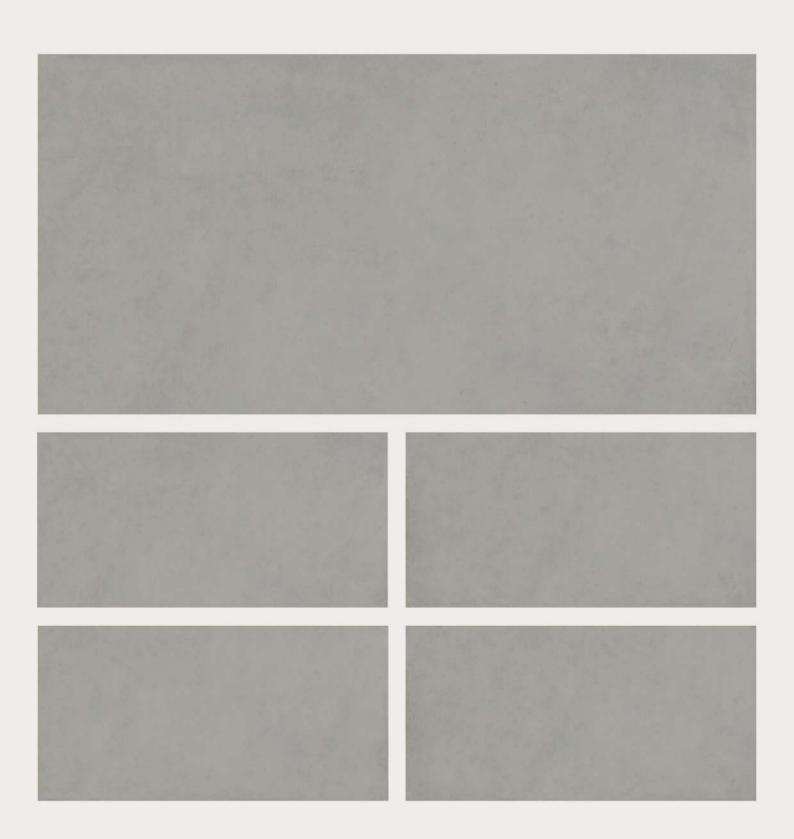


# **CONCRETE MYSTIC GREY**

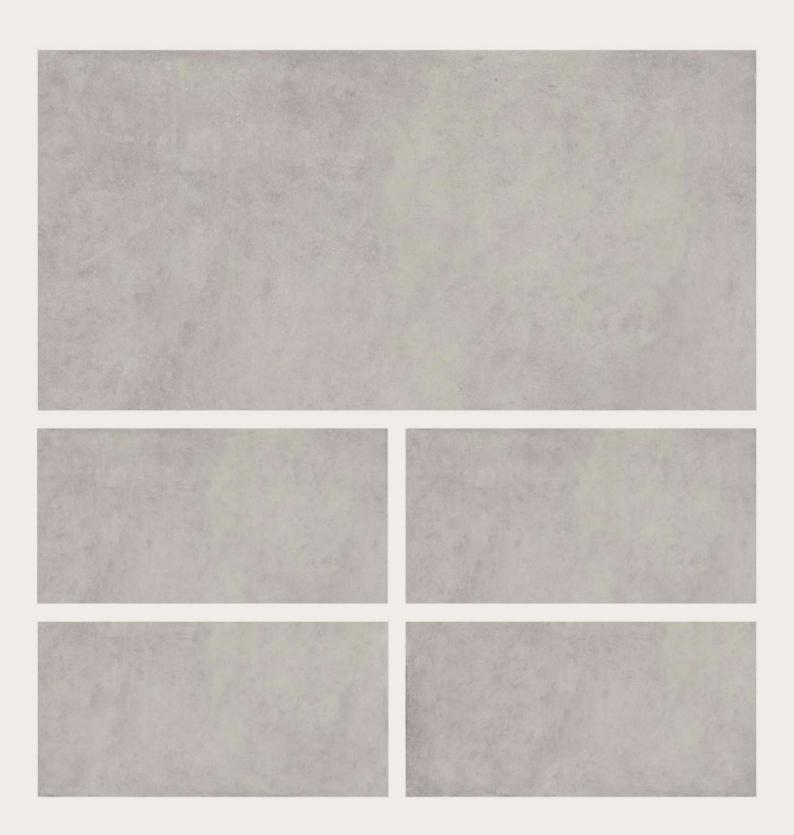


### **CONCRETE NEGRO**

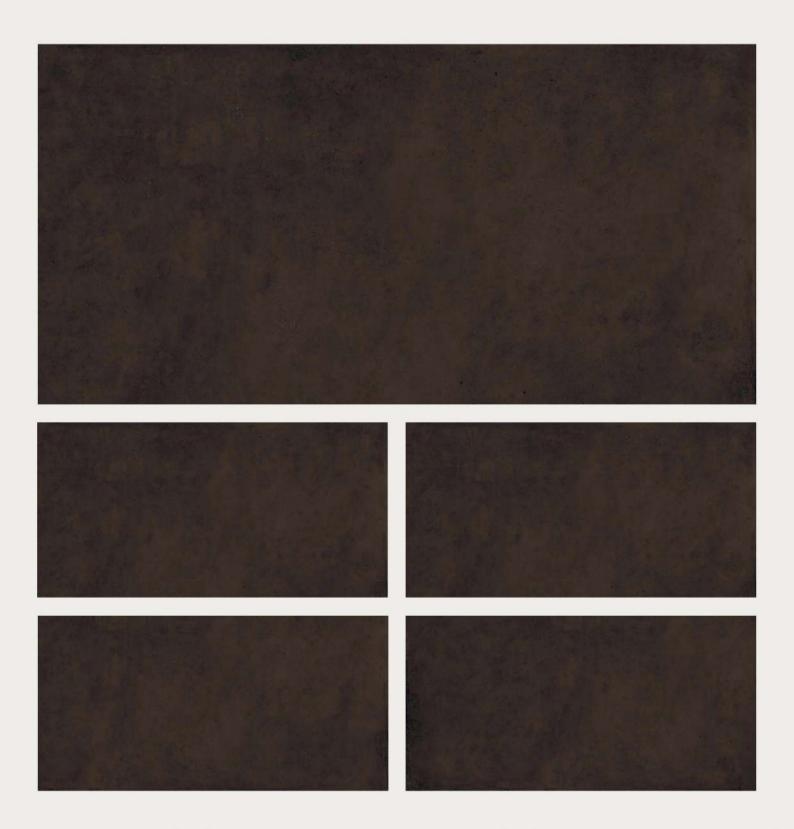


# **CONCRETE NERO**

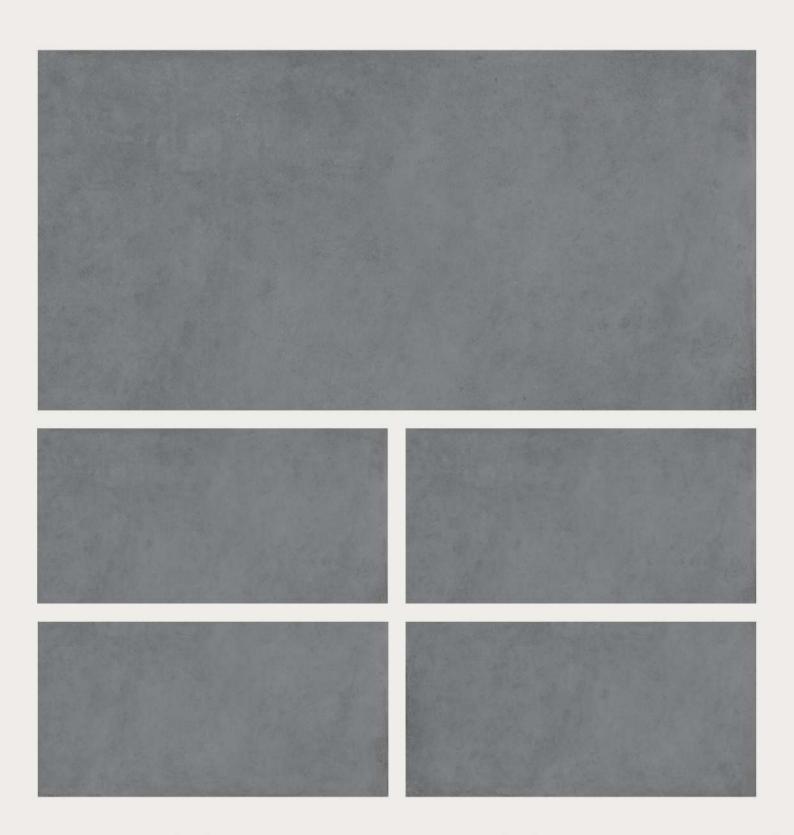


# **CONCRETE TAUPE**

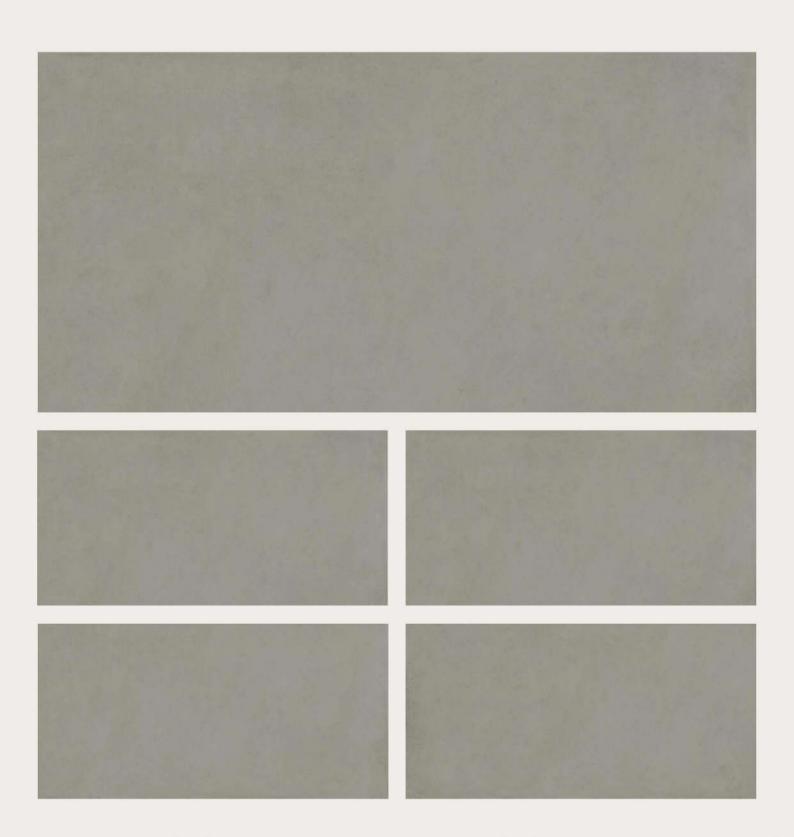

# **CONCRETE BROWN**

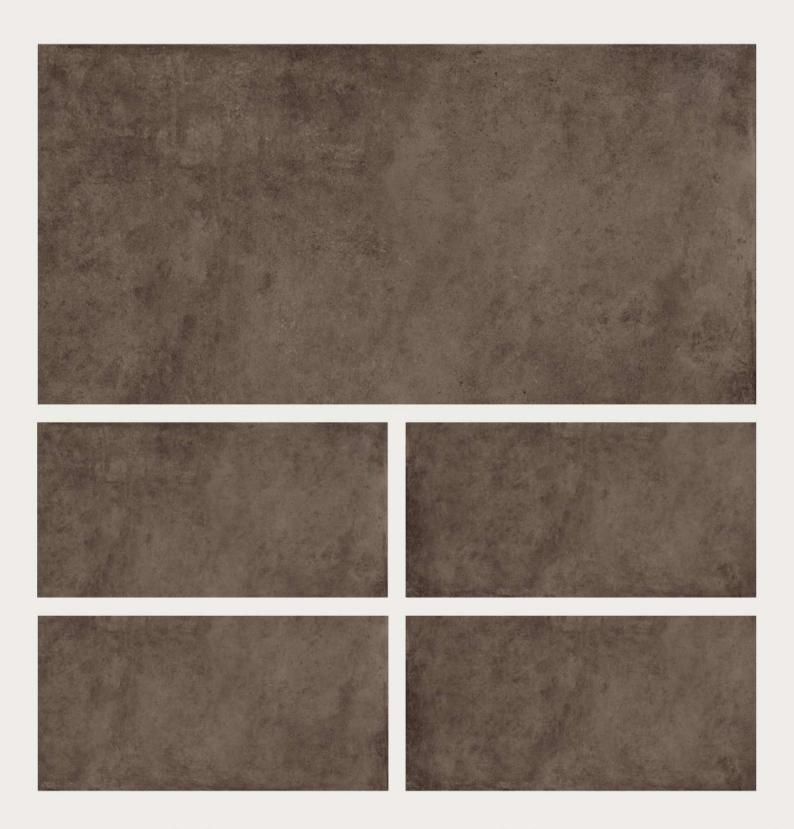


# **CONCRETE MOKA**

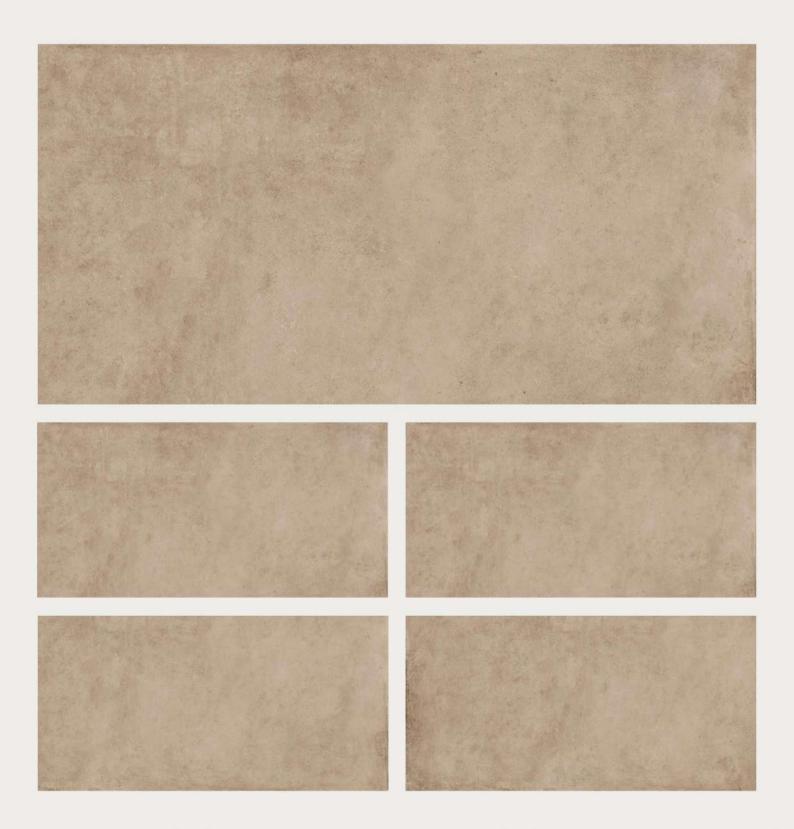


#### MARBLE TOUCH next level slab




# **DOWNTON GREY**

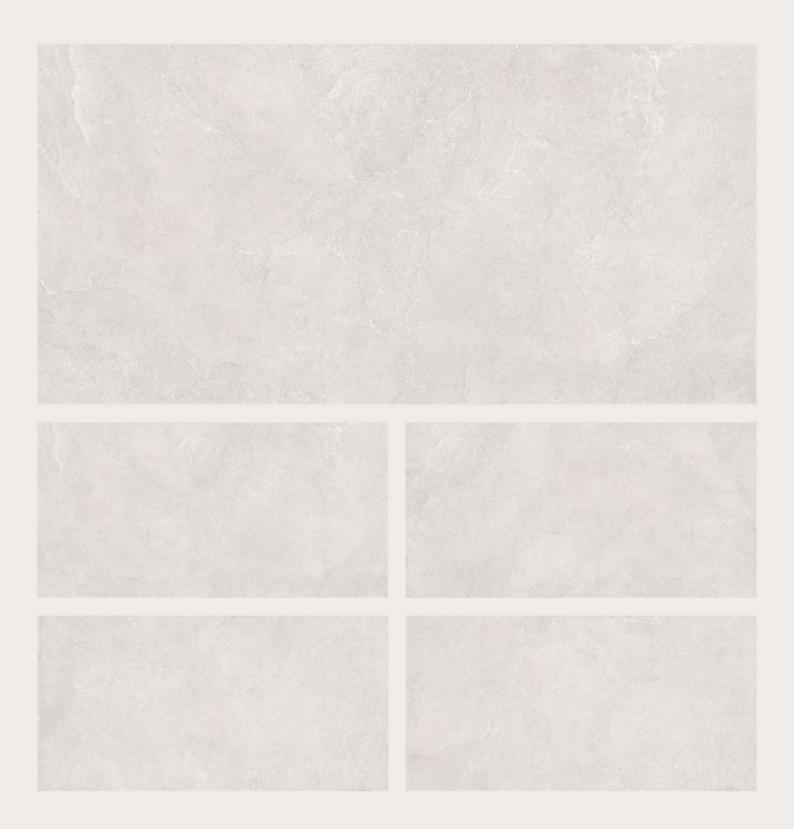



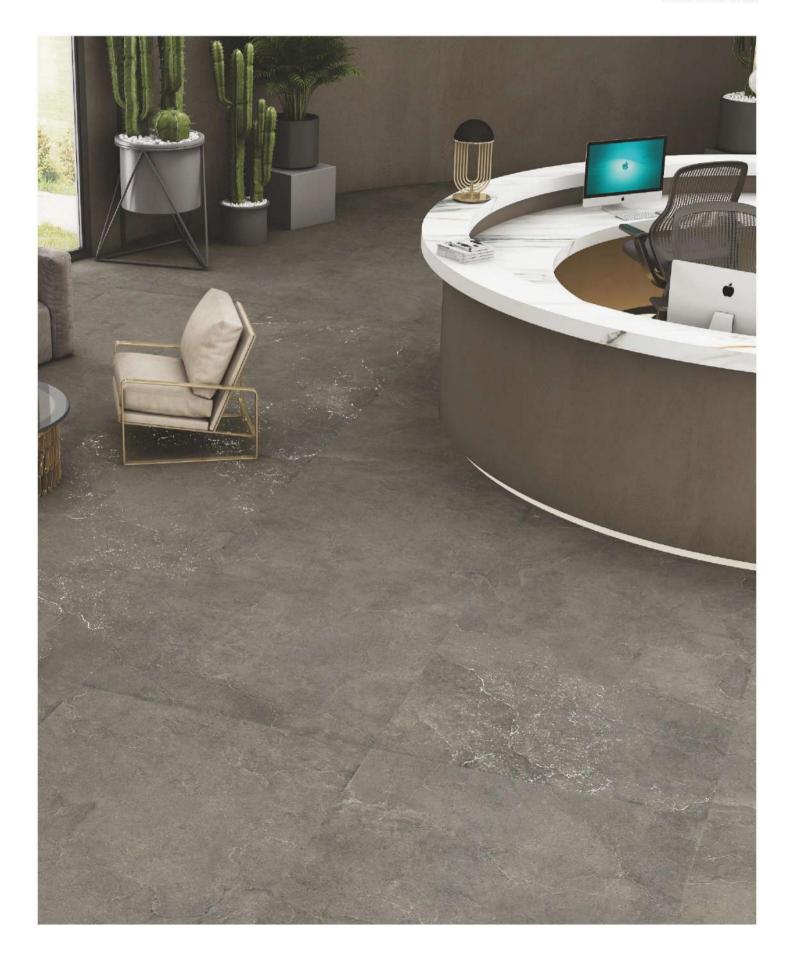

### **DOWNTON BEIGE**

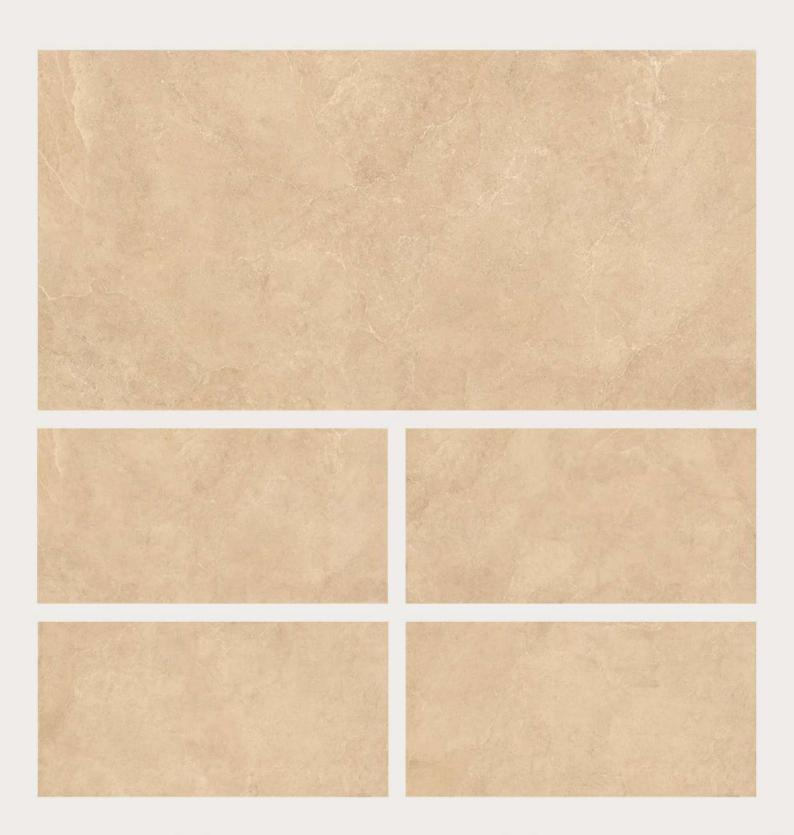

# **DOWNTON BROWN**



# **DYNA REAL**




FINISH | MATT CARVING




# **EAGLE BROWN**



### **ELEGANZA IVORY**

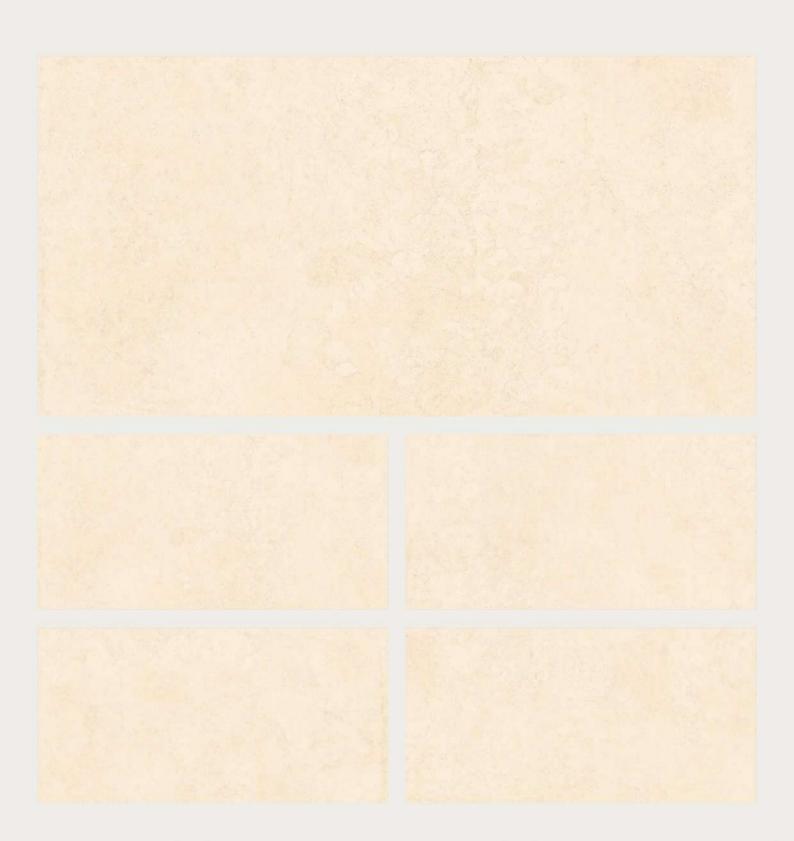

### **ELEGANZA SAND**

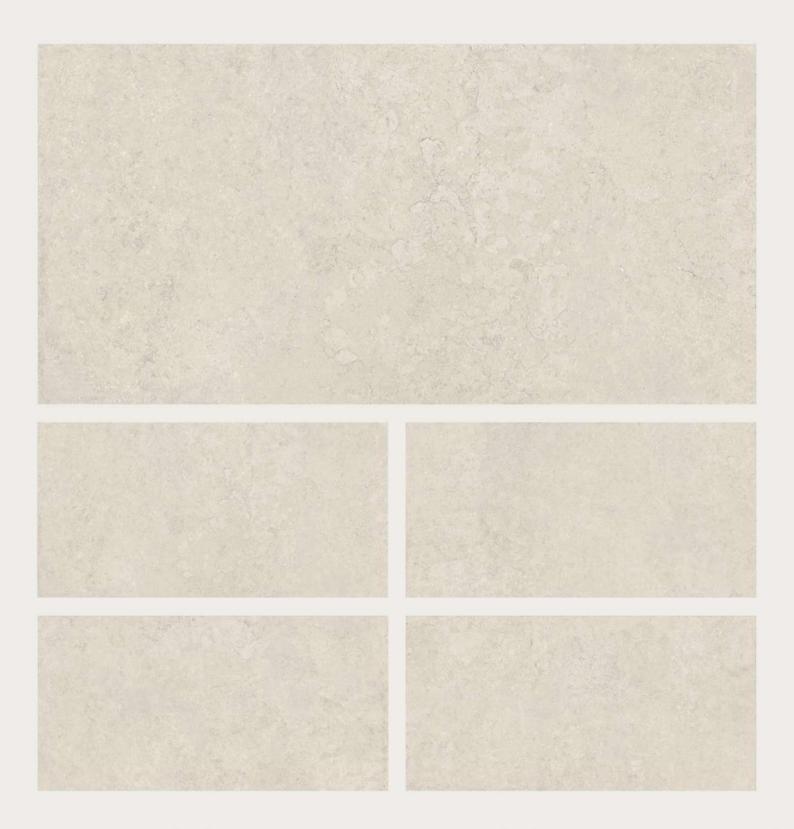

### **ELEGNZA GREY**



### **EPOQUE BEIGE**



# **EPOQUE BIANCO**



# **FENIX BEIGE**




### **FENIX BROWN**



# **FENIX GREY**



# **FLORITA BEIGE**

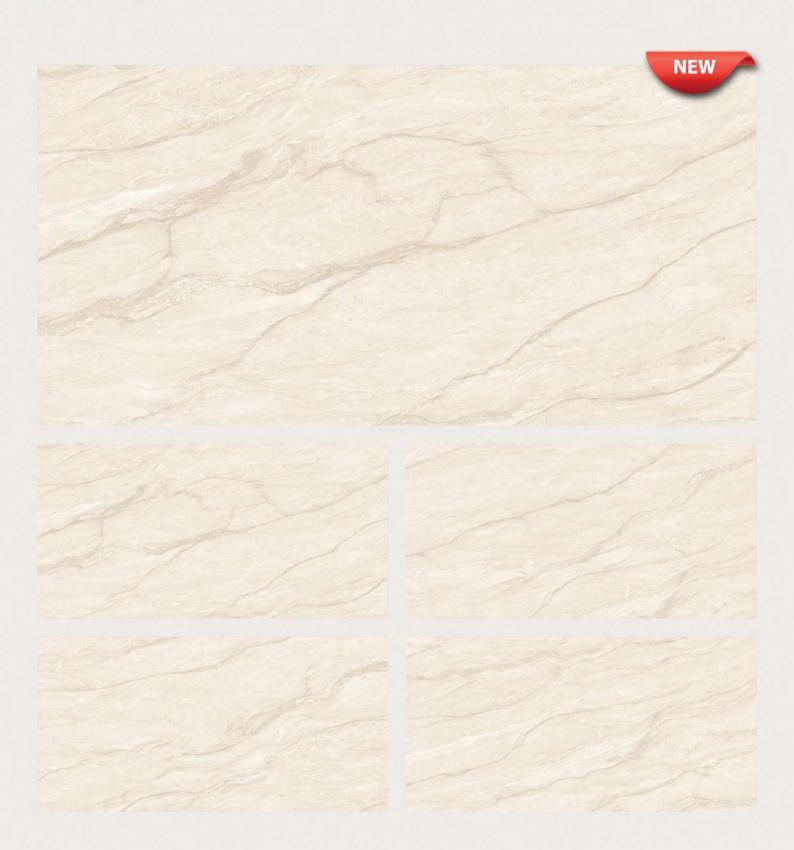


### **FLORITA SMOKE**




### **GLACIAR GOLD**




### **GLACIAR SILVER**

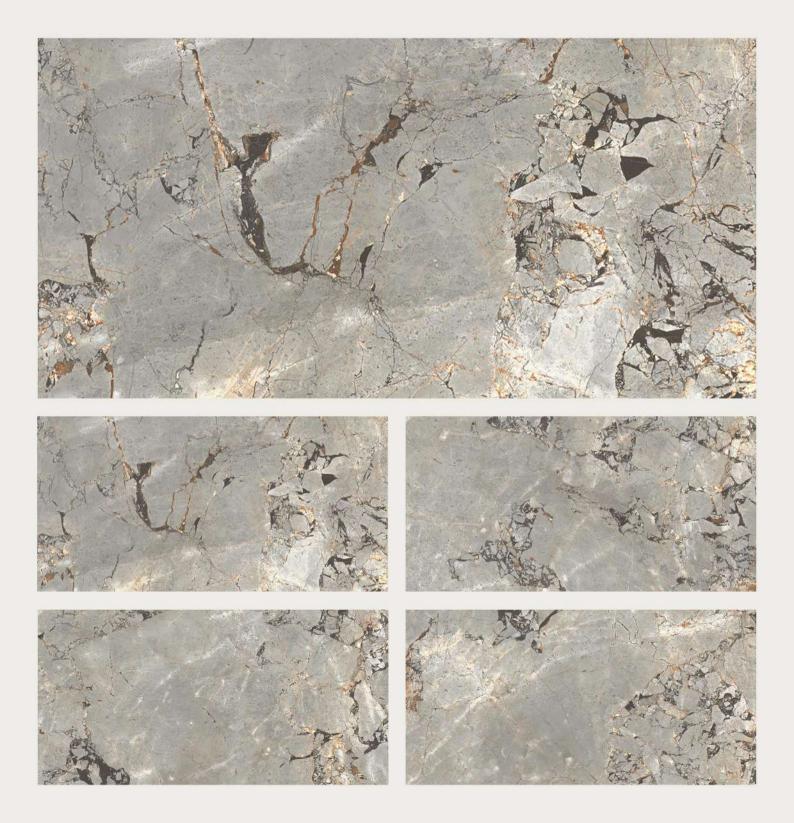


### **ILLINOIS CREMA**

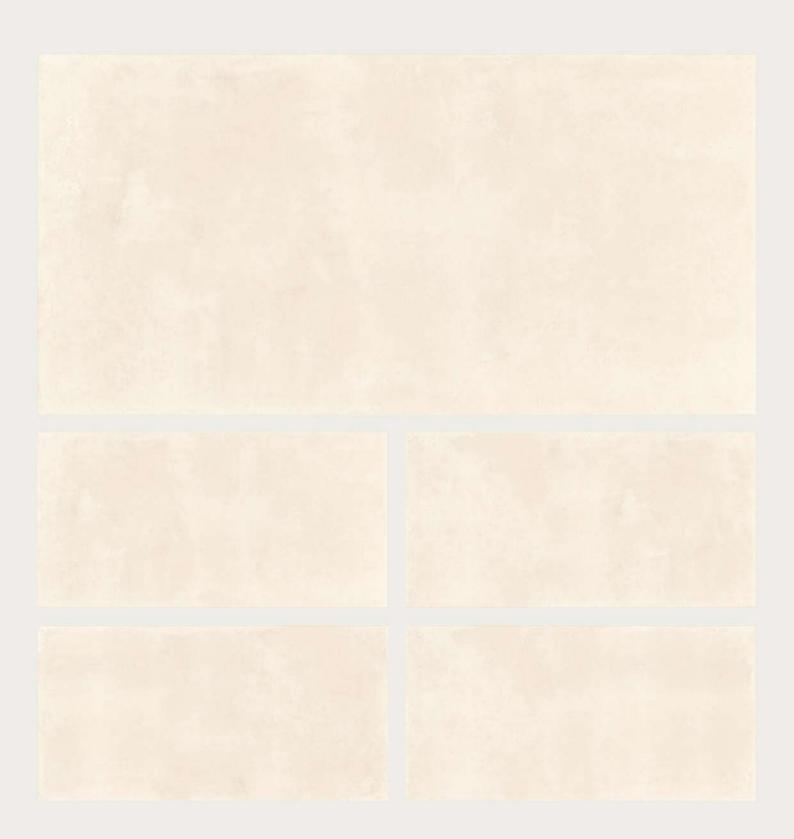


# **ILLINOIS GREY**

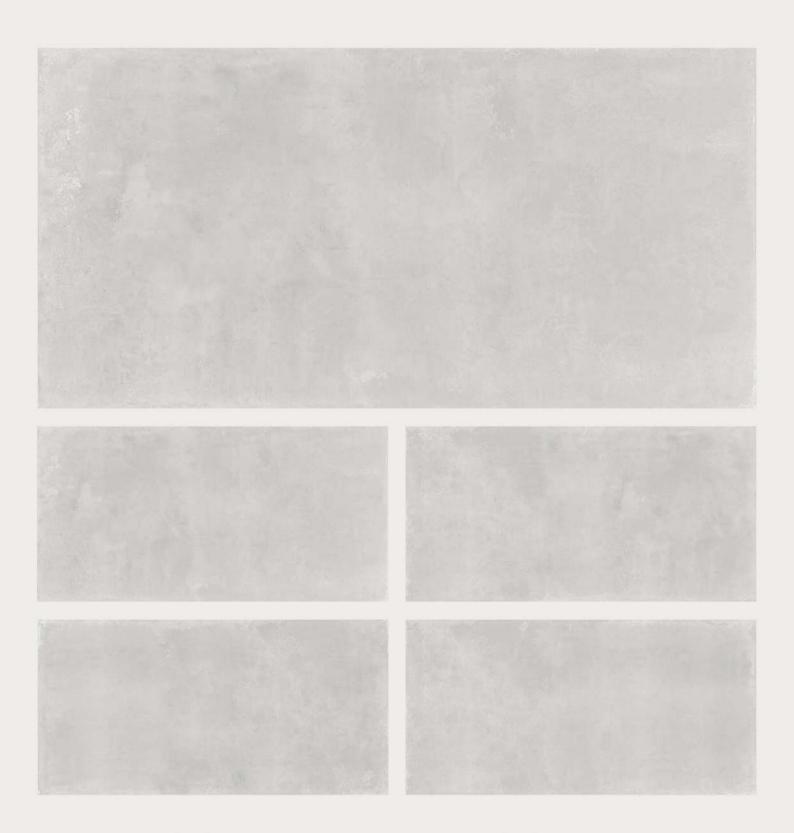

# **ILLINOIS GRIS**

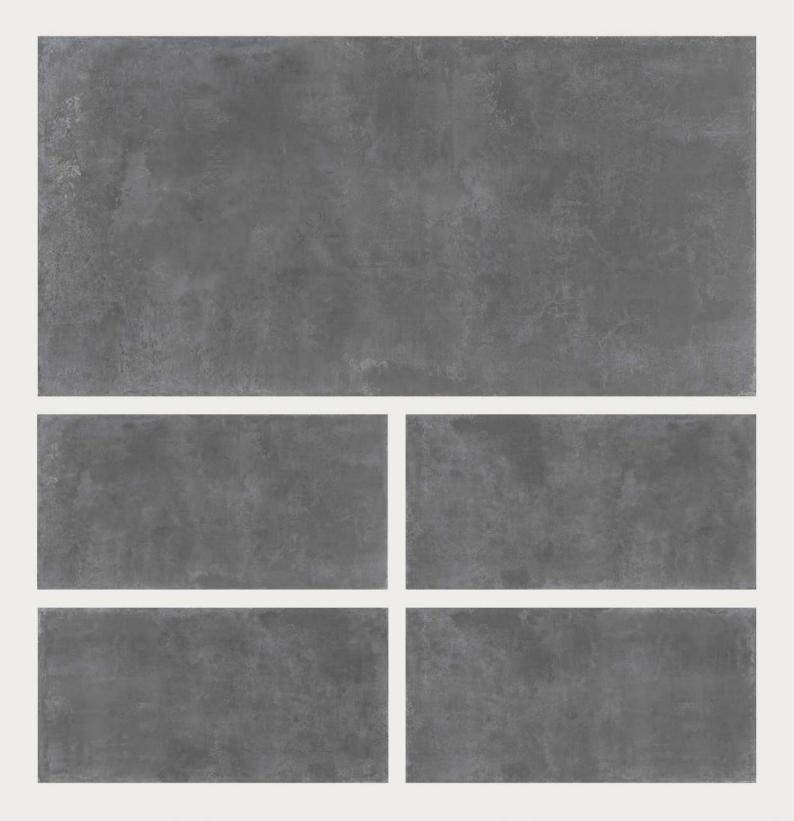

### **ILLINOIS TAUPE**

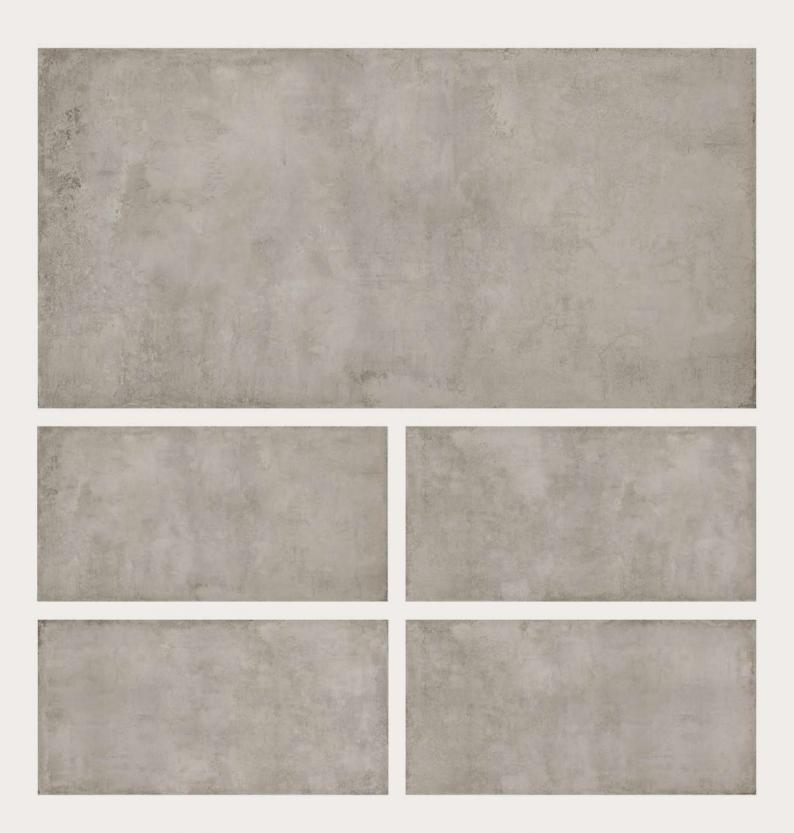

# LILAC WHITE



# MARFIL



### **NAXOS ANTRACITE**



# **NAXOS BEIGE**



# **NAXOS GRISS**



### **NOVELLA CREMA**

RANDOM

FINISH | MATT CARVING




### ROSALIA

RANDOM

FINISH | MATT CARVING





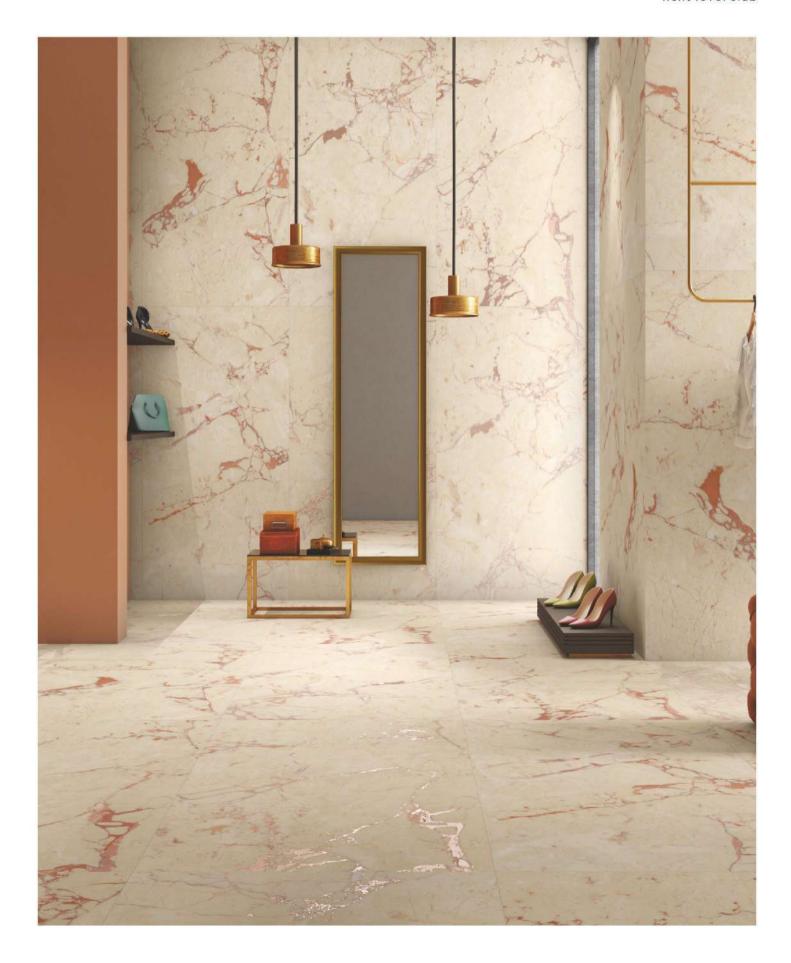

### SILVER RIVER



### SILVER ROOT GREY



# SILVER ROOT WHITE



### **SSILVER ROOT BROWN**






# SIVER ROOT BEIGE



# SIVER ROOT





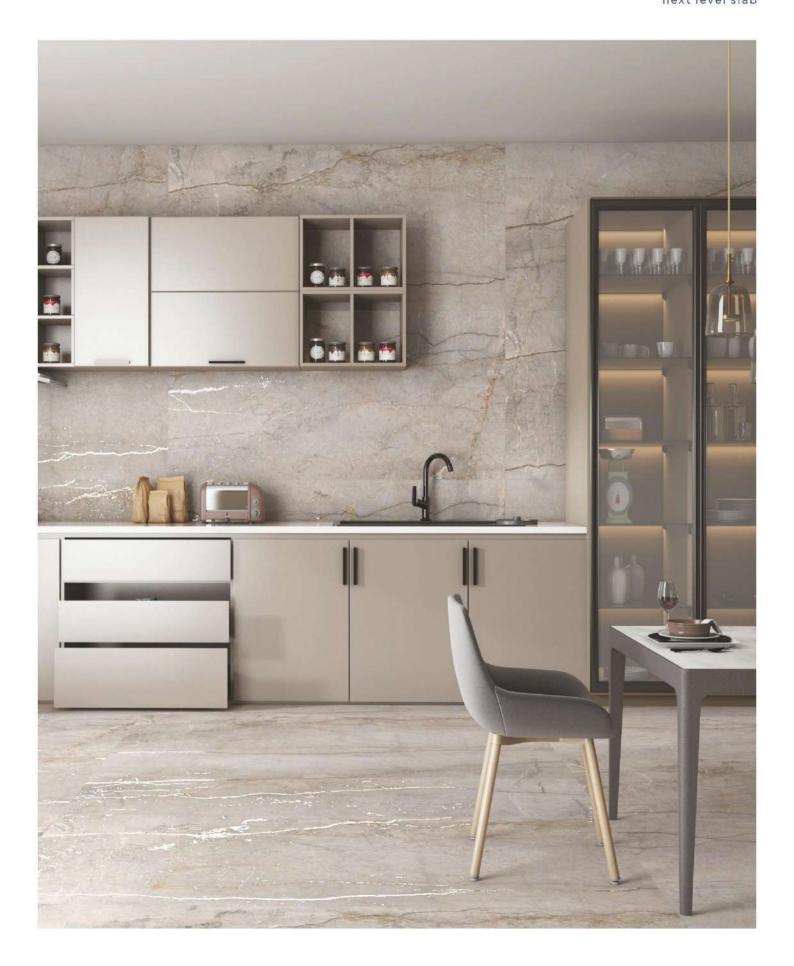

# STATUARIO LINER



### TRAVERTINE LATTE







### **VARSACE GOLD**



### **VARSACE TAN**



### **TECHNICAL SPECIFICATION**

CHARACTERISTIC	STANDARD AS PER IS0-13006/EN14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES			T
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROF	PERTIES		L
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PRO	PERTIES		
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PRO	OPERTIES		
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10-6	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES		,	
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off	As per mfg	Does not yield	ISO-10545-15
by glazed tiles	7.to por ring	Pb & Cd	100 100 10

#### **PACKING DETAILS**

Size	Tiles / Box	Coverage Area / Box	Coverage Area / Box
800X1600MM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

