

**THE
IRRESISTIBLE
STYLE OF
MARVELOUS
SLABS**

MARBLE TOUCH
next level slab

800x1600MM

INTENSE HIGHGLOSS



Why Marbletouch ?

THE DURABILITY OF MARBLETOUCH SLABS

makes them perfect for high-traffic areas as they're resistant to scratches and scuffs. Whether in an area of the home that sees high footfall, such as the hallway or kitchen or in a commercial space, porcelain is the most hardwearing.

The refined, exquisite spirit of Marbletouch slabs finds an intriguing new timeless collection of fine floors and coverings. The Marbletouch collection presents a unique and evolution of luxury for modern settings with unique allure. New structures and fine materials join forces to give the space a glamorous, contemporary look.

MARBLETOUCH
next level slab



800x1600MM | 32"X64"

ARMA BLACK

RANDOM

FINISH | INTENSE HIGHLIGHTS



800x1600MM | 32"X64"

BLACK ROGE

RANDOM

FINISH | INTENSE HIGHLIGHT



800x1600MM | 32"X64"

CALACUTTA BLACK

RANDOM

FINISH | INTENSE HIGHLIGHTS




800x1600MM | 32"X64"

ETERNAL BLACK

RANDOM

FINISH | INTENSE HIGHLIGHTS

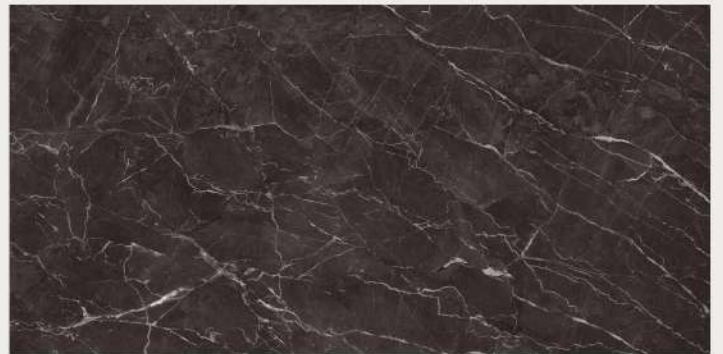



800x1600MM | 32"X64"

LAPONIA BLACK

RANDOM

FINISH | INTENSE HIGHLIGHTS




800x1600MM | 32"X64"

LAURENT BLUE

RANDOM

FINISH | INTENSE HIGHLIGHTS

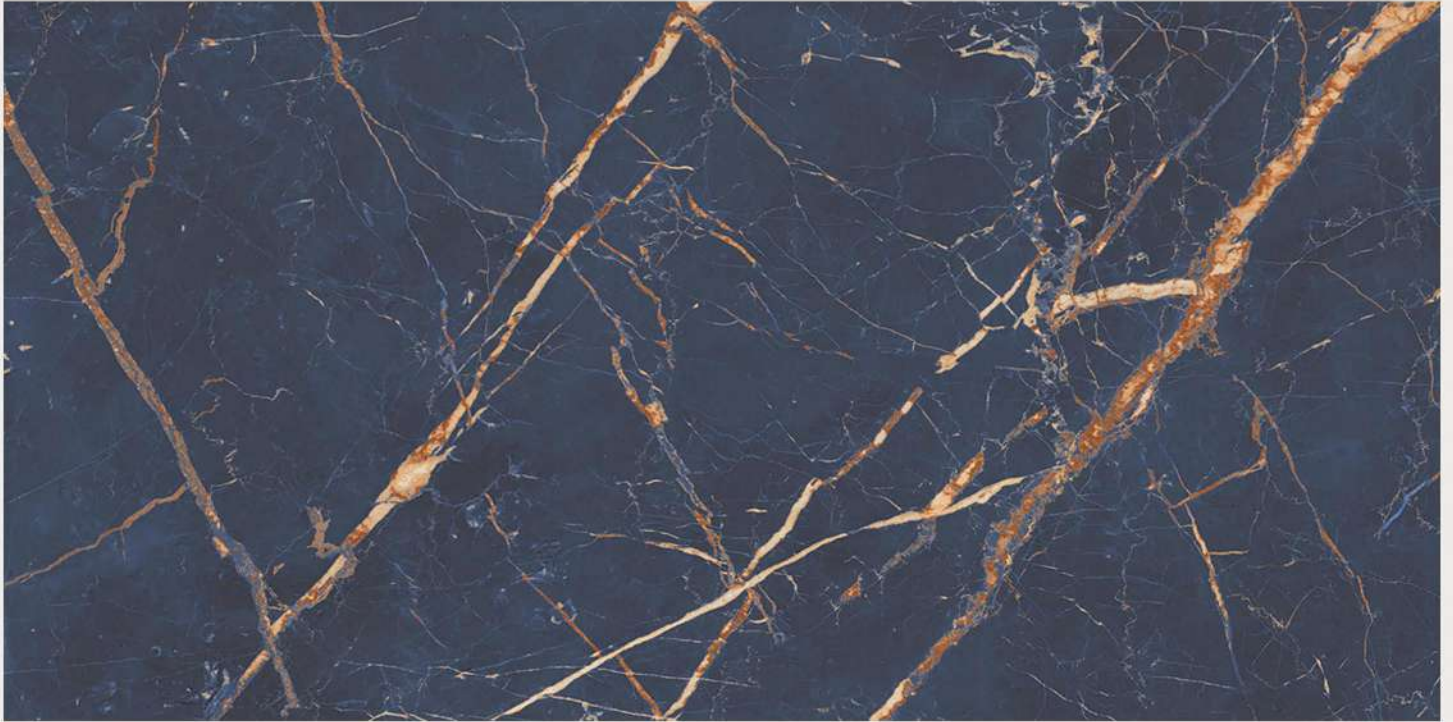


800x1600MM | 32"X64"

MILOS BLACK

RANDOM

FINISH | INTENSE HIGHLIGHTS





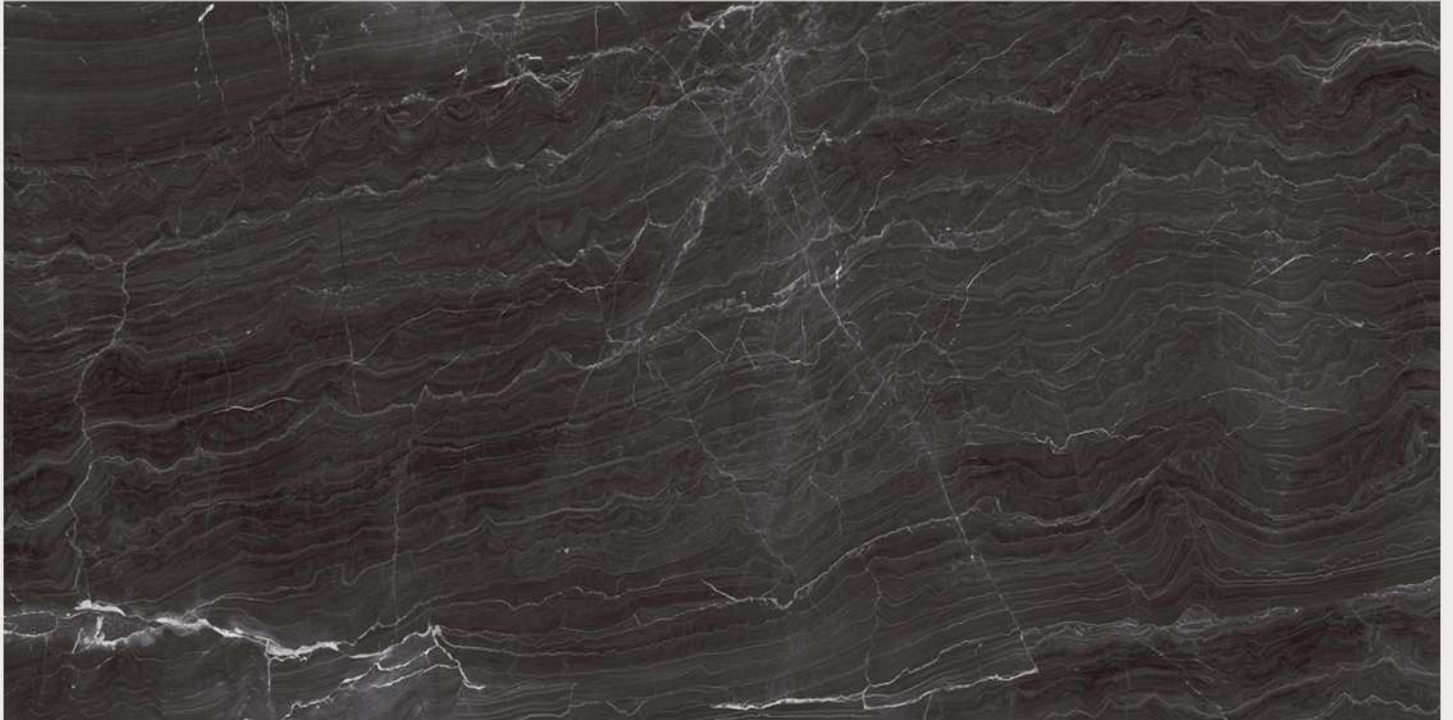


800x1600MM | 32"X64"

NOIR BLACK

RANDOM

FINISH | INTENSE HIGHLIGHTS

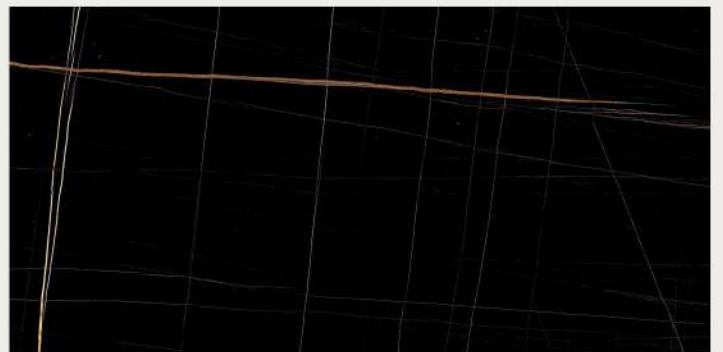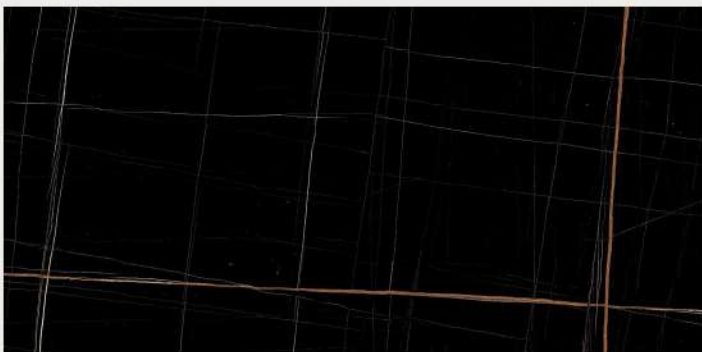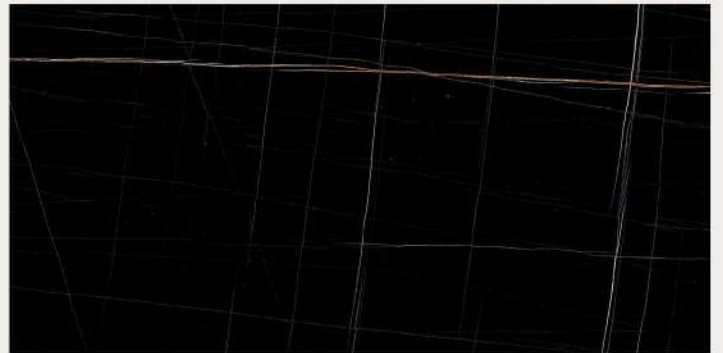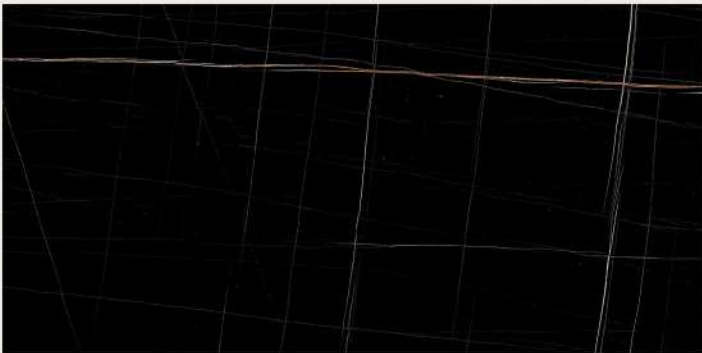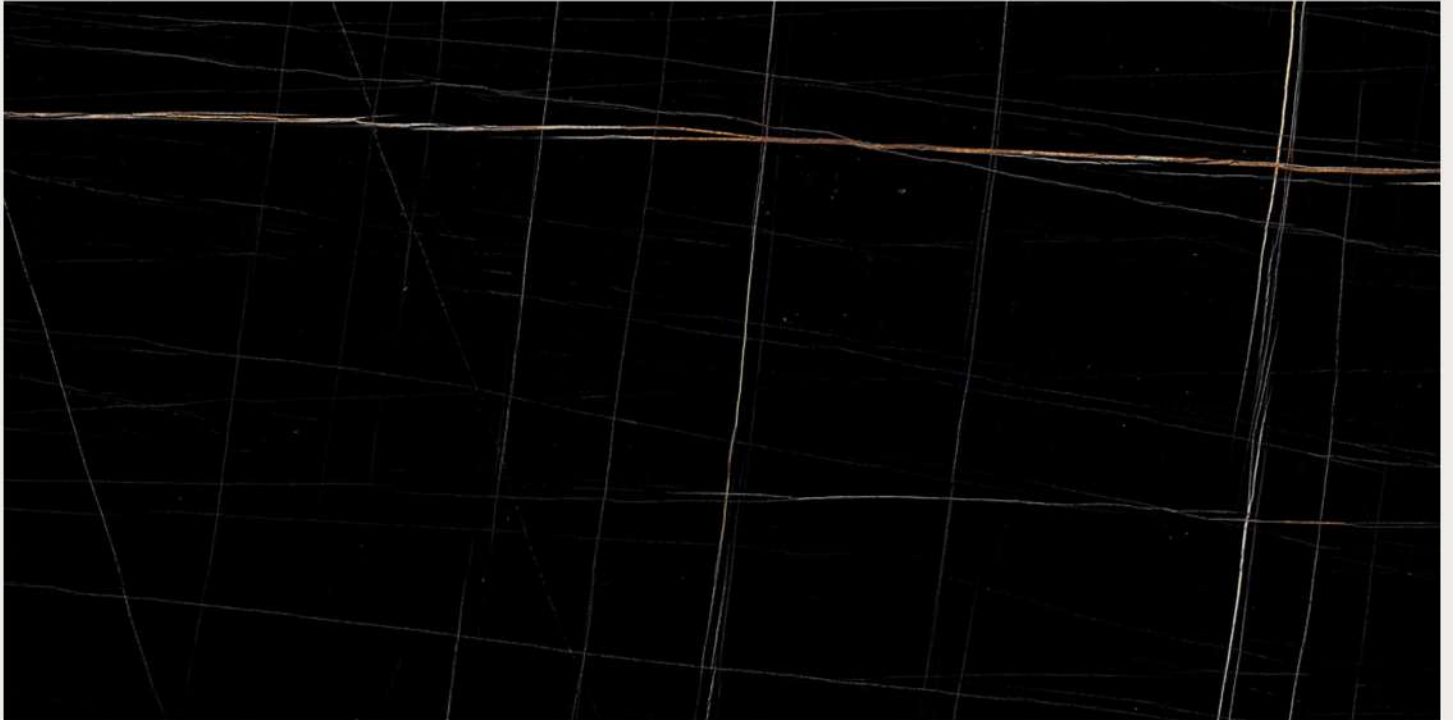




800x1600MM | 32"X64"

PEAR ONYX

RANDOM

FINISH | INTENSE HIGHLIGHT

NEW

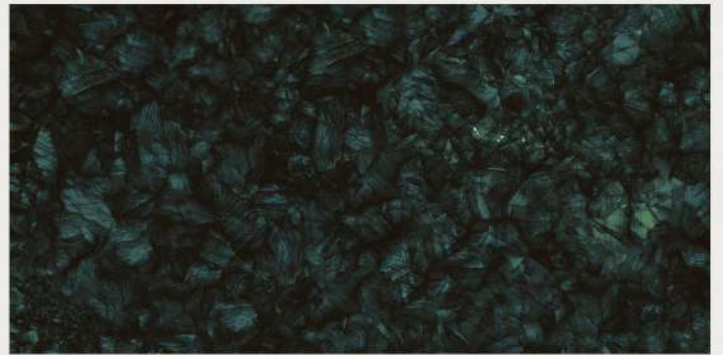


800x1600MM | 32"X64"

REGIA OCEAN

RANDOM

FINISH | INTENSE HIGHLIGHTS

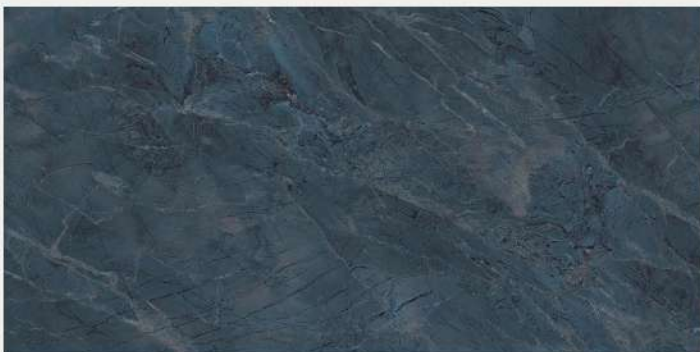

800x1600MM | 32"X64"

SAINT PORTO

RANDOM

FINISH | INTENSE HIGHLIGHTS



800x1600MM | 32"X64"

TRAVEX BLACK

RANDOM

FINISH | INTENSE HIGHLIGHTS




800x1600MM | 32"X64"

VOLGA BLUE

RANDOM

FINISH | INTENSE HIGHLIGHTS

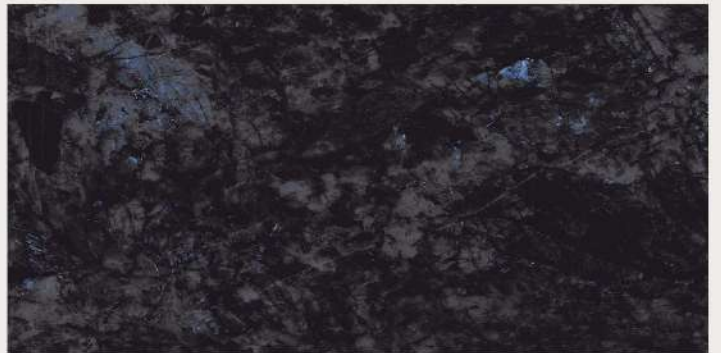



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg	Does not yield	ISO-10545-15
		Pb & Cd	

PACKING DETAILS

Size	Tiles / Box	Coverage Area / Box (approx.)	Coverage Area / Box (approx.)
800X1600MM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

